


- 2. NON-IMPACT RESISTANT GLAZING OPTION (SEE PAGE 3) .090" MINIMUM SSB ANNEALED GLAZING IN MOLDED FRAMES SCREWED TOGETHER WITH DIMENSIONS SHOWN IN TABLE, INSTALLED IN TOP OR INTERMEDIATE SECTION (WITH OR WITHOUT DECORATIVE INSERTS) MEETS UNIFORM STATIC WIND PRESSURES SHOWN ON THIS DRAWING. GLAZING IS NOT IMPACT RESISTANT AND DOES NOT MEET THE REQUIREMENTS FOR WIND-BORNE DEBRIS REGIONS.
- 3. VINYL OR WOOD DOOR STOP NAILED A MAXIMUM OF 6"
  O.C. MUST OVERLAP TOP AND BOTH ENDS OF PANELS
  MINIMUM 7/16" TO MEET NEGATIVE PRESSURES.
- 4. KEY LOCK, SLIDE LOCK, OR OPERATOR REQUIRED.
- 5. FACER STEEL TO HAVE A MINIMUM 29 GA THICKNESS AND BACKER STEEL TO HAVE A MINIMUM 29 GA THICKNESS.
- 6. EACH SECTION HAS AN INTERNAL 1"WIDE X 20 GA CONTINUOUS STEEL STRIP AT THE TOP AND BOTTOM OF THE SECTION.
- 7. THE DESIGN OF THE SUPPORTING STRUCTURAL ELEMENTS SHALL BE THE RESPONSIBILITY OF THE PROFESSIONAL OF RECORD FOR THE BUILDING OR STRUCTURE AND IN ACCORDANCE WITH CURRENT BUILDING CODES FOR THE LOADS LISTED ON THIS DRAWING.
- 8. DOOR JAMB TO BE MINIMUM 2x6 STRUCTURAL GRADE LUMBER. REFER TO JAMB CONNECTION SUPPLEMENT FOR ATTACHMENT TO SUPPORTING STRUCTURE.
- 9. FOR LOW HEAD ROOM LIFT CONDITIONS, TOP BRACKET SHALL BE A 13 GA LHR 7/4 TOP BRACKET WITH A MINIMUM OF (3) 1/4-20x3/4" SELF DRILLING CRIMPTITE SCREWS IN LIEU OF THE BRACKET SHOWN ON THIS DRAWING. U-BAR ON TOP SECTION SHALL BE INSTALLED ON TOP OF LHR TOP BRACKETS.

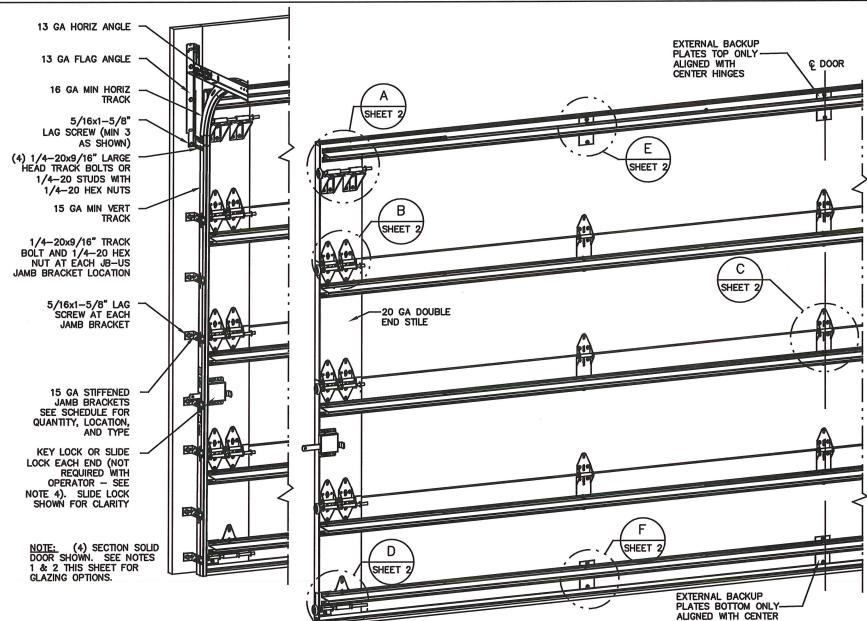

SUPERIMPOSED DESIGN PRESSURE OADS ON SUPPORTING STRUCTURE

DOOR HEIGHT UNIFORM LOAD EACH JAMB (PLF)

17'-2" ALL +197.4/-214.6

18'-2" ALL +208.9/-227.1

	JAMB BRACKET SCHEDULE								
DOOR HEIGHT	NO. OF SECTIONS	NO. OF JAMB BRACKETS (EACH JAMB)	LOCATION OF CENTERLINE OF JAMB BRACKETS MEASURED FROM BOTTOM OF TRACK (ALL DIMENSIONS ± 2")						
6'-6"	4	7	2" (JB-US), 10" (JB-US), 21-3/4" (JB-US), 29-3/4" (JB-US), 39" (JB-US), 48" (JB-US), 57-1/4" (JB-US)						
7'-0"	4	7	2" (JB-US), 10" (JB-US), 21-3/4" (JB-US), 29-3/4" (JB-US), 42" (JB-US), 52-1/2" (JB-US), 63-1/4" (JB-US)						
7'-6"	4 OR 5	8	2" (JB-US), 10" (JB-US), 18-3/4" (JB-US), 26-3/4" (JB-US), 36" (JB-US), 45" (JB-US), 54-1/4" (JB-US), 74-1/2" (JB-US)						
8'-0"	4 OR 5	8	2" (JB-US), 10" (JB-US), 21-3/4" (JB-US), 29-3/4" (JB-US), 39" (JB-US), 48" (JB-US), 57-1/2" (JB-US), 75-1/2" (JB-US)						
> 8'−0"			SEE NOTE BELOW						

NOTE: (JB-US) FOLLOWING DIMENSION DENOTES SLOTTED JAMB BRACKET ATTACHED TO TRACK WITH 1/4-20x9/16" TRACK BOLT AND NUT AS SHOWN ABOVE.

ALL DOORS GREATER THAN 8' IN HEIGHT REQUIRE USE OF CONTINUOUS WALL ANGLE. SEE SUPPLEMENT TRACK CHART FOR DETAILS.

DWAYNE J KORNISH

DWAYNE J KORNISH

DWAYNE J KORNISH, PE

4576 COUNTY ROAD 180

MOUNT HOPE, OHIO

FL PE 77945

TX PE 117868

PROFESSIONAL ENGINEER'S SEAL PROVIDED ONLY FOR VERIFICATION OF WINDLOAD CONSTRUCTION DETAILS.

The Genuine. The Original.

SIZE: A SCALE: N.T.S. STATIC PRESSURE RATINGS APPROVED SIZES NAME DESIGN (PSF): +23.00/-25.00 MAX WIDTH: DATE 5/06/20 SW MAX HEIGHT: 24'-0" DRAWN TEST (PSF): +34.50/-37.50 TLC IMPACT/CYCLIC RATED (YES/NO): YES MAX SECTION HEIGHT: 24" CHECKED 4/5/21 SHEET 1 OF

DIVISION OF OVERHEAD DOOR CORF 3395 ADDISON DRIVE PENSACOLA, FLORIDA 32514 (850) 474-9890

MODELS 190/490/160/593/594/591/592/596/599/5740/5760/7560 WINDLOAD SPECIFICATION OPTION CODE 2251

DRAWING PART NO. REV. 411720 A

**REVISIONS** 

P1 REVISED MODELS PER

GLAZING CROSS-SECTION

SW 9/14/2020


TLC 4/5/21

DRAWING TO SHOW


WL008


COMPLIES WITH THE REQUIREMENTS OF IBC/IRC 2018.

HINGES

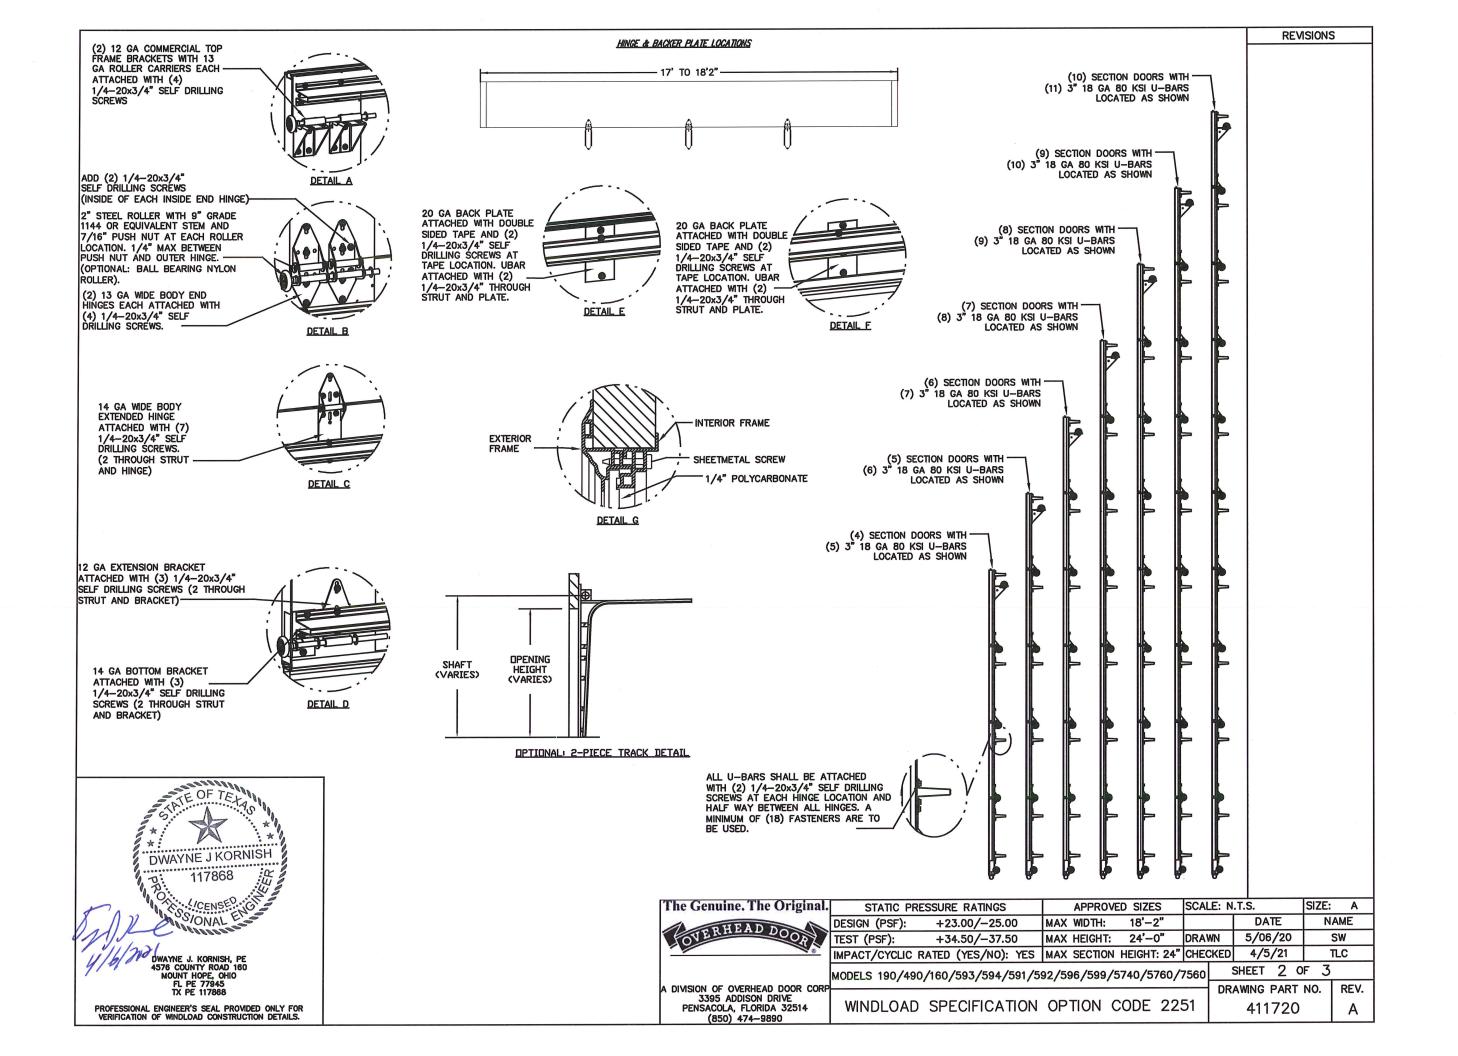





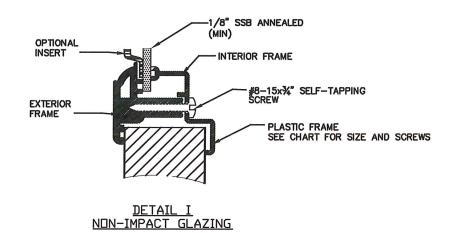

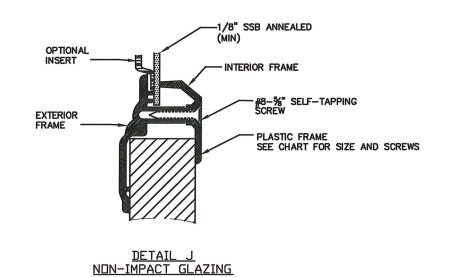

	OUTSIDE FRAME SIZE	DAYLIGHT OPENING (DLO)	SCREW QTY EA HORIZ LEG	SCREW QTY EA VERT LEGS	SCREW QTY TOTAL	DETAIL
[	17"X51"	14X48	5	3	16	ı
ſ	15.1X44"	11.5"X40.5"	8	3	22	J
[	14.9X20.8"	11"X17"	3 .	3	12	J
	7"X40.8	4"X37.8"	5	2	14	J
	15.3"X44.1"	11.3"X40.1"	6	3	18	K
	14.6"X20.8"	10.6"X16.8"	3	2	10	K
ſ	13"X38"	9"X34"	5	2	14	K

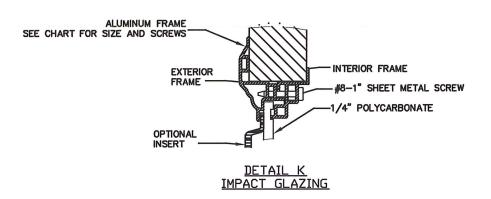

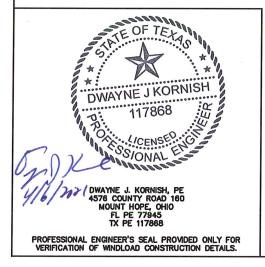

The Genuine. The Original.

STATIC PRESSURE RATINGS APPROVED SIZES SCALE: N.T.S. SIZE: A DESIGN (PSF): +23.00/-25.00 MAX WIDTH: 18'-2" NAME 5/06/20 +34.50/-37.50 MAX HEIGHT: 24'-0" DRAWN SW IMPACT/CYCLIC RATED (YES/NO): YES MAX SECTION HEIGHT: 24" CHECKED 4/5/21 TLC SHEET 3 OF 3 MODELS 190/490/160/593/594/591/592/596/599/5740/5760/7560

A DIVISION OF OVERHEAD DOOR CORP 3395 ADDISON DRIVE PENSACOLA, FLORIDA 32514 (850) 474-9890

WINDLOAD SPECIFICATION OPTION CODE 2251

DRAWING PART NO. REV. 411720 A