

This product has been evaluated per ANSI/DASMA 108 for static air pressure.

Jamb bracket quantities shown are for use with grade 2 or better southern pine jambs.

Supporting structural elements are to be designed by a registered professional engineer for specific wind loads.

Door Widths Up To	Design Pressures		End Stile	Model Number					
	+ psf	- psf		Minimum Center		Minimum Center		Minimum Center	
				Stiles	Hinges	Stiles	Hinges	Stiles	Hinges
8'-2"	26.5	-30.0	Single	1	1	1	1	1	1
9'-2"	23.6	-26.7	Single	1	1	1	1	1	1
10'-2"	21.3	-24.1	Single	2	2	1	1	2	2

This product is designed and sold by PSF. The AHJ or Engineer of Record is responsible for determining the PSF required for any given site.

Door Height	Total # of Sections	Total # of Struts	Jamb Brkts per Side
6'-0"	3	3	2
6'-0"	4	4	2
6'-3"	4	4	2
6'-6"	4	4	3
6'-9"	4	4	3
7'-0"	4	4	3
7'-3"	4	4	3
7'-6"	4	4	3
7'-6"	5	5	3
7'-9"	4	4	3
7'-9"	5	5	3
8'-0"	4	4	3
8'-0"	5	5	3

**NOTICE:** These drawings are a supplement to the installation instructions for a standard door and only covers those procedures that vary from standard door installation. If these specific procedures are not followed, the door may not perform as designed.


Maximum section height is 24 in.

Maximum door height is 20 ft.


All doors, even those above the tested height, are available with jamb brackets or commercial full angle. The maximum spacing of the jamb brackets/track clips should be maintained.

COMPLIES WITH IBC/IRC 2018 Professional Engineer seal provided only for verification of wind load construction details.


John E. Scates, P.E.  
2560 King Arthur Blvd. Ste 124-54  
Lewisville, Texas 75056  
Texas P.E. 56308/F2203




<b>DESCRIPTION:</b> 10' 2" PAN 2000 SERIES WIND LOAD SECTIONAL DOOR DESIGN PRESSURE +21.3/-24.1 PSF			
<b>DRAWING NO.:</b> WLT-2000-0122-08-21-24	<b>REV.:</b> A		
<b>DRAWN BY:</b> MVS	<b>DATE DRAWN:</b> 11/6/18	<b>REV. DATE:</b> 3/8/22	
<b>MODEL(S):</b> See Sheet 3	<b>SHEET: 1 OF 4</b>		

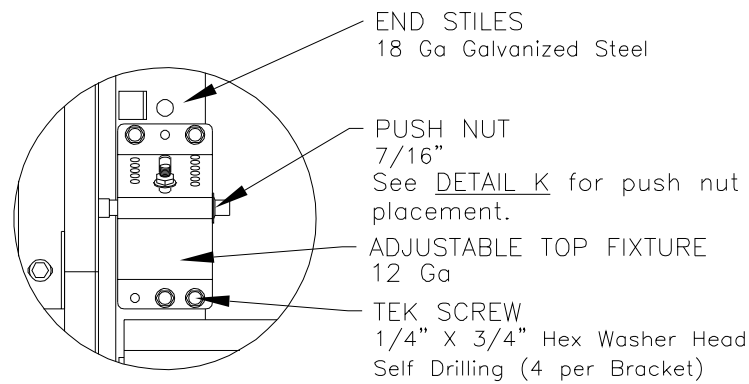


**DETAIL A**

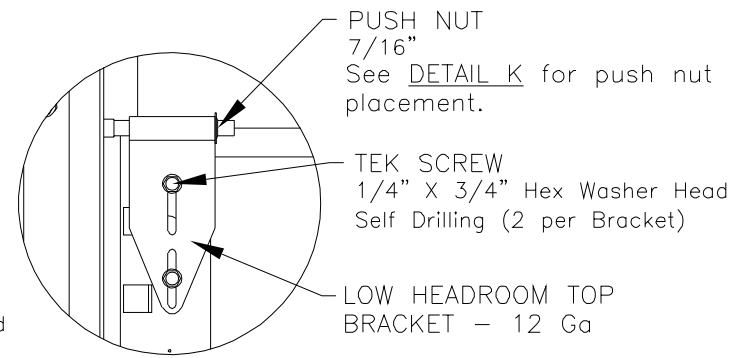


**LOW HEADROOM TOP BRACKET**

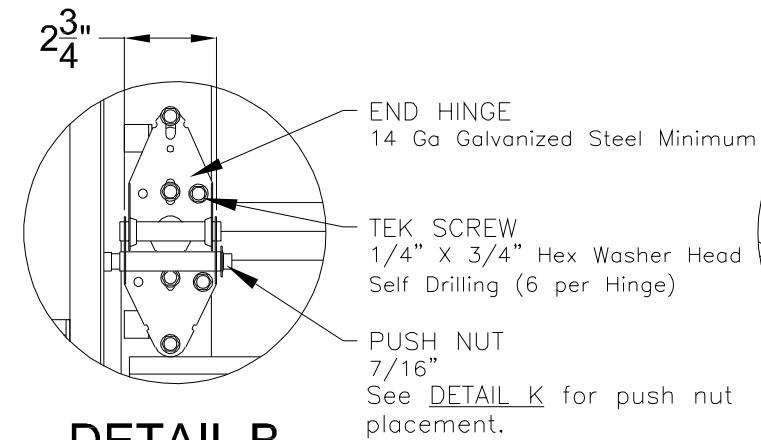


**DETAIL B**

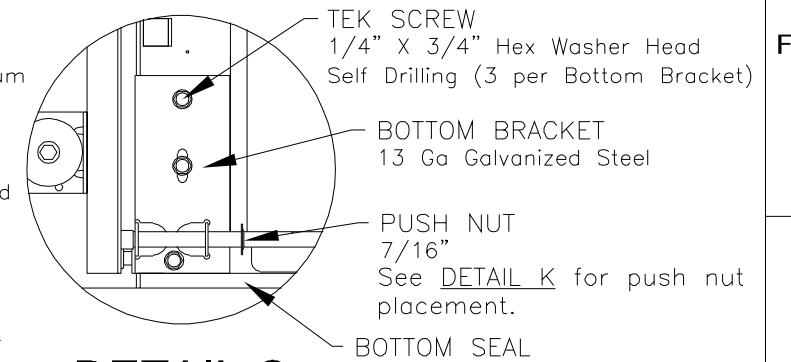


**DETAIL C**

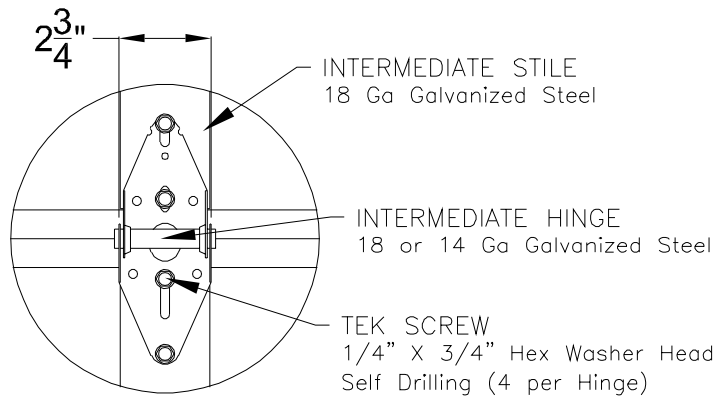


**DETAIL D**

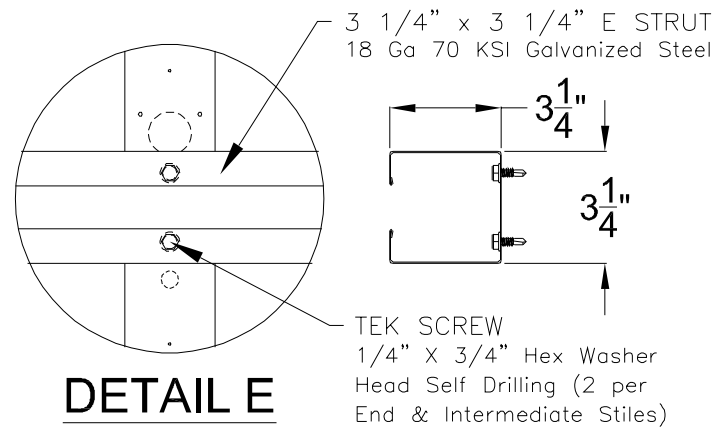


**DETAIL E**

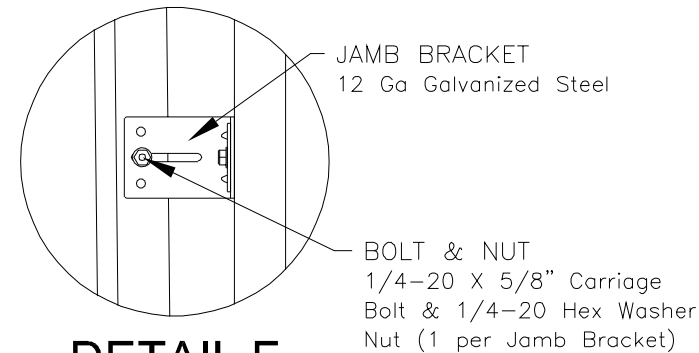

**DETAIL F**


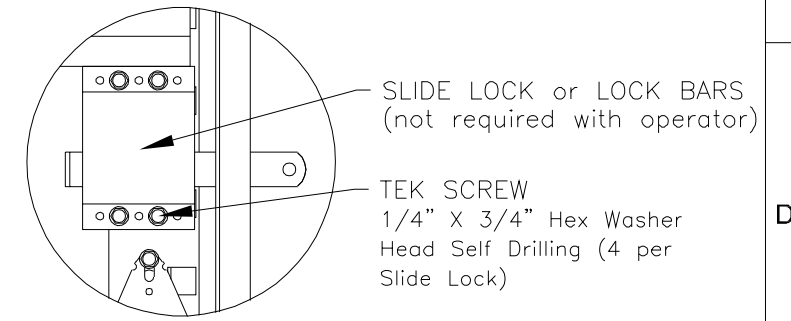


**DETAIL G**

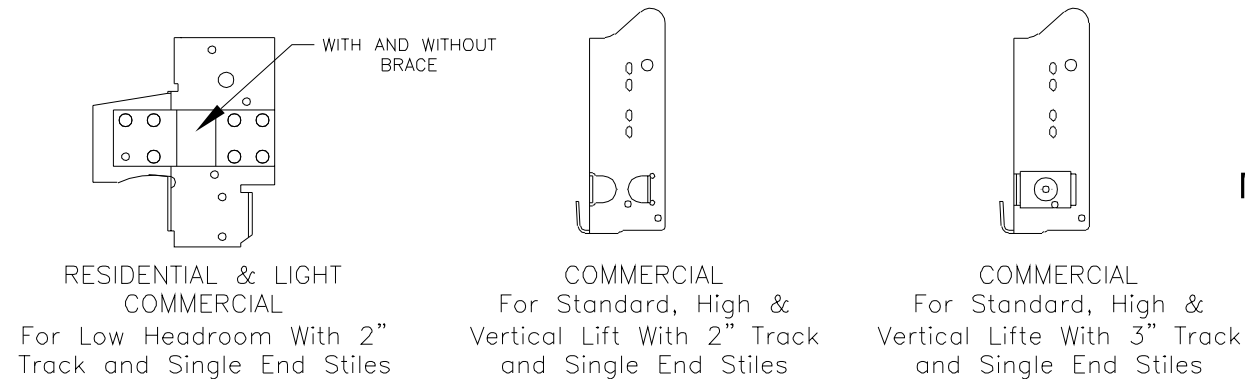


**ALTERNATE BOTTOM BRACKETS**

NOTE: The bottom bracket tested (shown in DETAIL C) is the lightest bracket available.

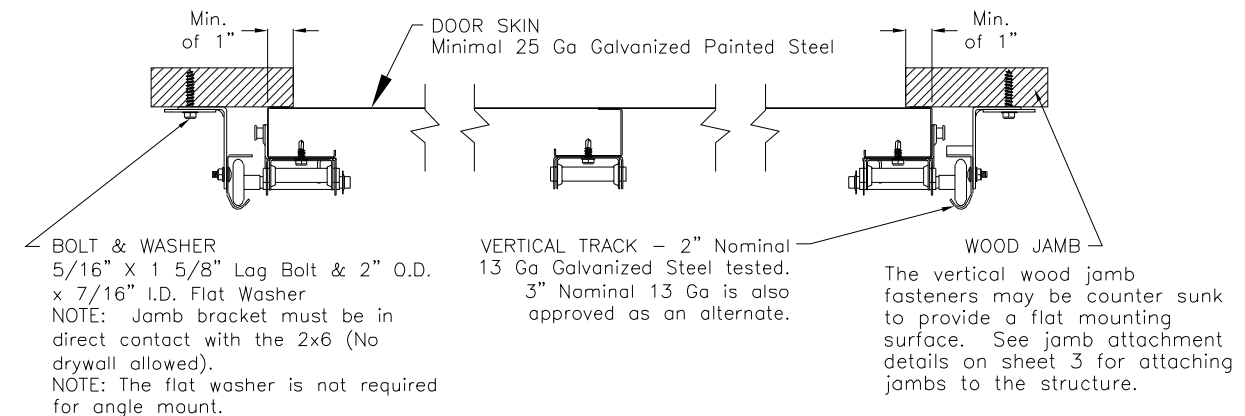

**DETAIL K**


There should be a space of maximum 1/2" between the roller hub and the outside edge of the roller holder which is set by the push nut.



**ROLLER**

2" Diameter Nominal Eleven Ball Nylon or Ten Ball Steel with a Minimum Workable Shaft Length Shown.

NOTE: Details on some views omitted for clarity. Double end stiles and end hardware may be provided on wider or heavier doors.

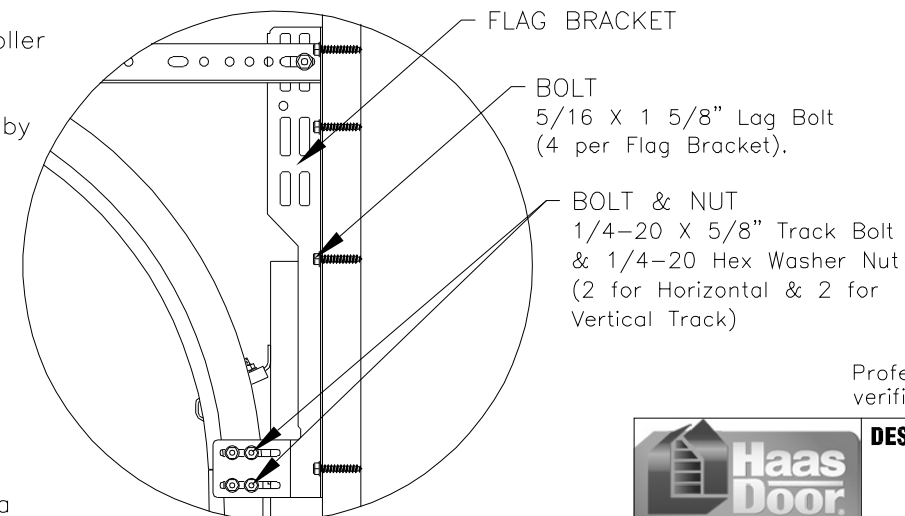

**DETAIL H**

John E. Scates, P.E.  
2560 King Arthur Blvd. Ste 124-54  
Lewisville, Texas 75056  
Texas P.E. 56308/F2203


Professional Engineer seal provided only for verification of wind load construction details.



**DESCRIPTION:**  
10' 2" PAN 2000 SERIES WIND LOAD SECTIONAL DOOR  
DESIGN PRESSURE +21.3/-24.1 PSF

<b>DRAWING NO.:</b> WLT-2000-0122-08-21-24	<b>REV.:</b> A
<b>DRAWN BY:</b> MVS	<b>DATE DRAWN:</b> 11/6/18
<b>MODEL(S):</b> See Sheet 3	<b>REV. DATE:</b> 3/8/22
<b>SHEET: 2 OF 4</b>	

320 Sycamore  
Wauseon, Ohio 43567  
© Copyright 2014

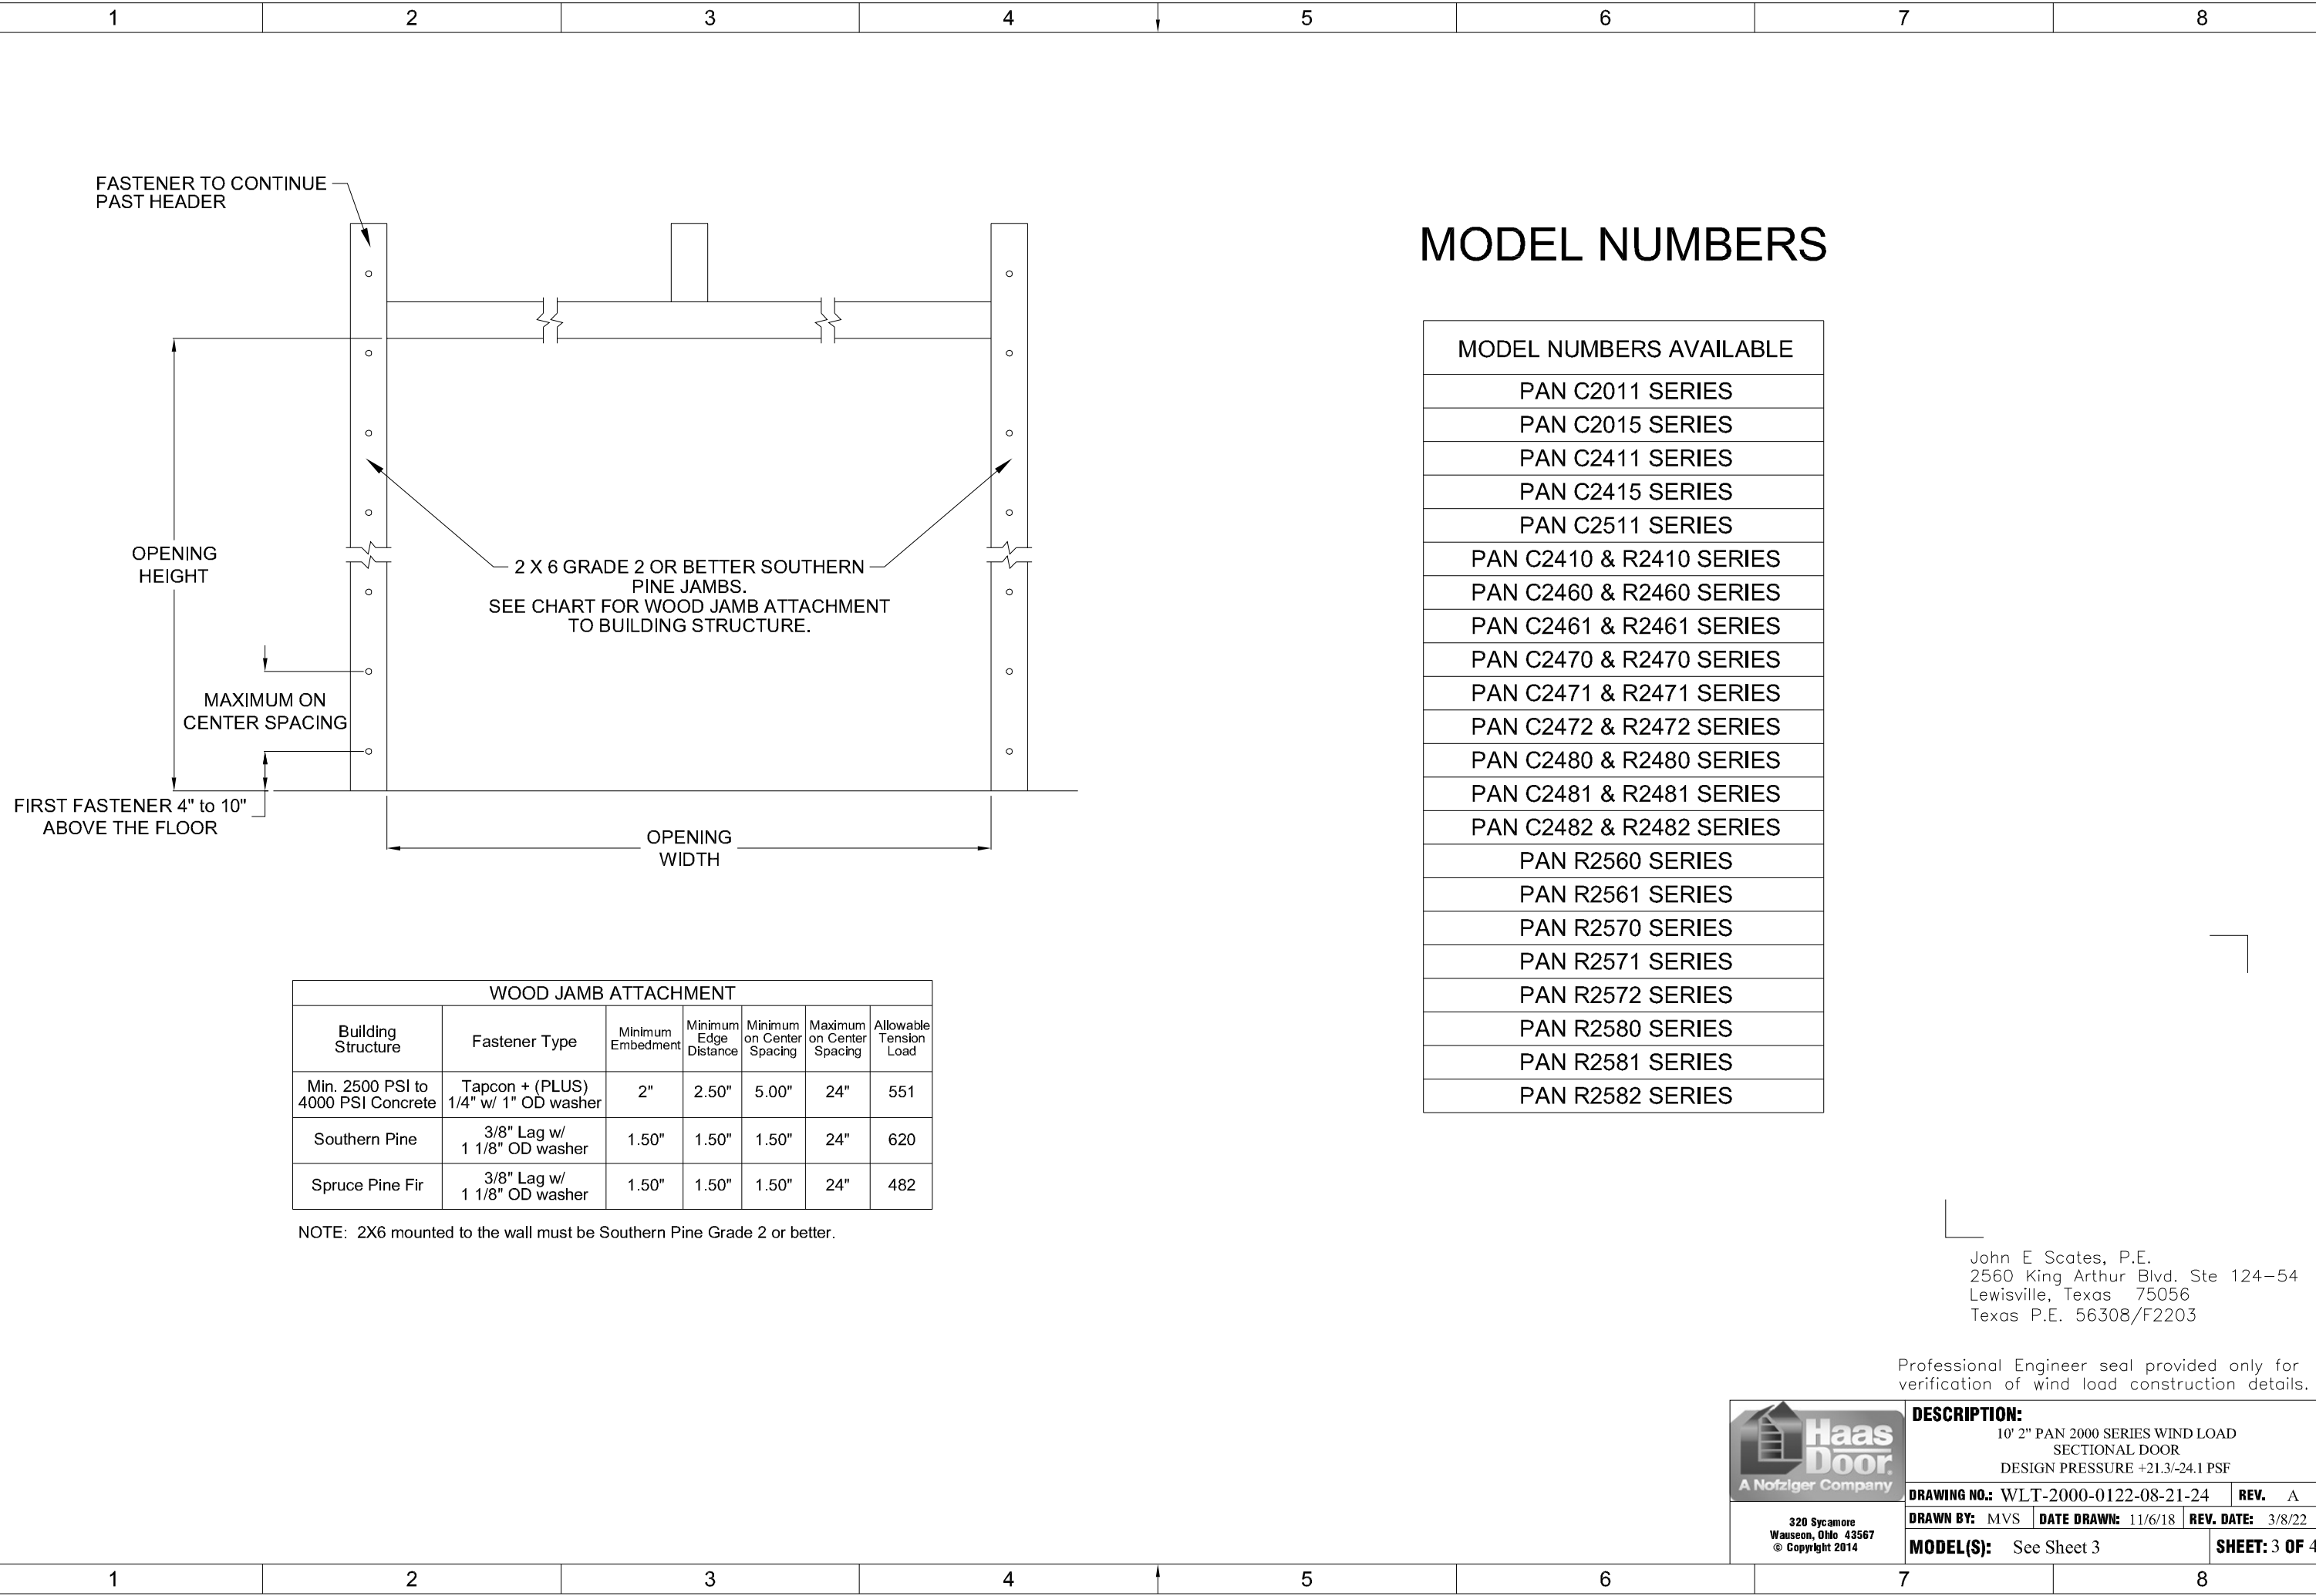

# MODEL NUMBERS

MODEL NUMBERS AVAILABLE
PAN C2011 SERIES
PAN C2015 SERIES
PAN C2411 SERIES
PAN C2415 SERIES
PAN C2511 SERIES
PAN C2410 & R2410 SERIES
PAN C2460 & R2460 SERIES
PAN C2461 & R2461 SERIES
PAN C2470 & R2470 SERIES
PAN C2471 & R2471 SERIES
PAN C2472 & R2472 SERIES
PAN C2480 & R2480 SERIES
PAN C2481 & R2481 SERIES
PAN C2482 & R2482 SERIES
PAN R2560 SERIES
PAN R2561 SERIES
PAN R2570 SERIES
PAN R2571 SERIES
PAN R2572 SERIES
PAN R2580 SERIES
PAN R2581 SERIES
PAN R2582 SERIES

WOOD JAMB ATTACHMENT						
Building Structure	Fastener Type	Minimum Embedment	Minimum Edge Distance	Minimum on Center Spacing	Maximum on Center Spacing	Allowable Tension Load
Min. 2500 PSI to 4000 PSI Concrete	Tapcon + (PLUS) 1/4" w/ 1" OD washer	2"	2.50"	5.00"	24"	551
Southern Pine	3/8" Lag w/ 1 1/8" OD washer	1.50"	1.50"	1.50"	24"	620
Spruce Pine Fir	3/8" Lag w/ 1 1/8" OD washer	1.50"	1.50"	1.50"	24"	482

NOTE: 2X6 mounted to the wall must be Southern Pine Grade 2 or better.


John E. Scates, P.E.  
 2560 King Arthur Blvd. Ste 124-54  
 Lewisville, Texas 75056  
 Texas P.E. 56308/F2203

Professional Engineer seal provided only for verification of wind load construction details.



<b>DESCRIPTION:</b> 10' 2" PAN 2000 SERIES WIND LOAD SECTIONAL DOOR DESIGN PRESSURE +21.3/-24.1 PSF			
<b>DRAWING NO.:</b> WLT-2000-0122-08-21-24	<b>REV.:</b> A		
<b>DRAWN BY:</b> MVS	<b>DATE DRAWN:</b> 11/6/18	<b>REV. DATE:</b> 3/8/22	
<b>MODEL(S):</b> See Sheet 3			<b>SHEET: 3 OF 4</b>


320 Sycamore  
 Wauseon, Ohio 43567  
 © Copyright 2014

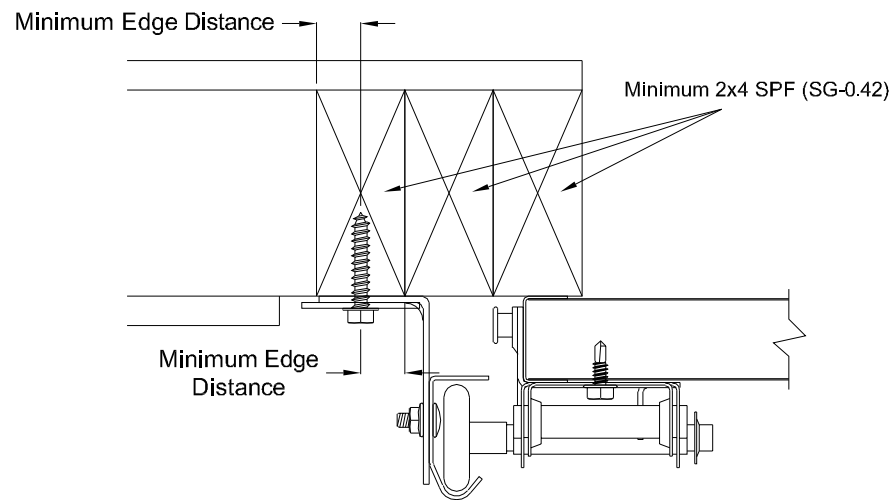

### Direct Wood Mounting Detail

Bracket Mount Shown, Reverse and Continuous Angle Mount Also Approved As Alternate.


439 lbs. per anchor allowable load  
 5/16" Dia. Lag Screw w/1-1/8" O.D. Flat Washer (shall conform to ANSI/ASME standard B18.2.1)  
 Minimum Screw Length: Spruce-Pine-Fur (SPF) - 2-1/2"  
 Southern Pine - 1-5/8"  
 Minimum Edge Distance: 1/2"  
 Maximum on Center Spacing: 24"

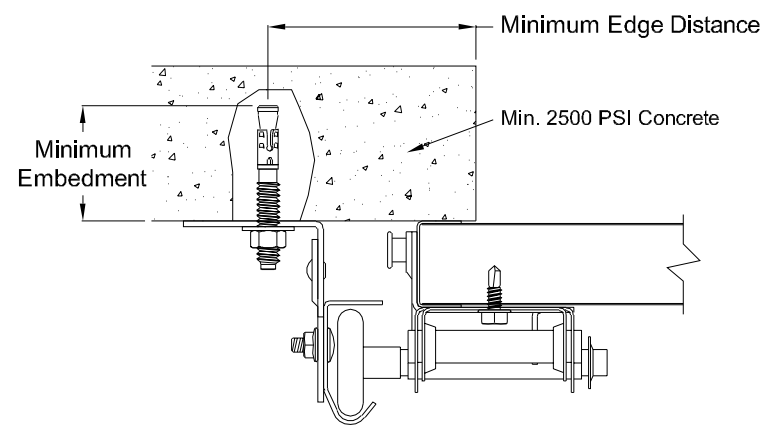

### Direct Concrete Mounting Detail

Continuous Angle Clip Mount Shown, Bracket and Reverse Continuous Angle Mount Also Approved As Alternate.


831 lbs. per anchor allowable load  
 3/8" Dia. Ankr-Tite CCAT w/1-1/8" O.D. Flat Washer (by Wej-It Fastening Systems)  
 Minimum Embedment: 2-5/8"  
 Minimum Edge Distance: 2-1/2"  
 Minimum on Center Spacing: 6"  
 Maximum on Center Spacing: 24"

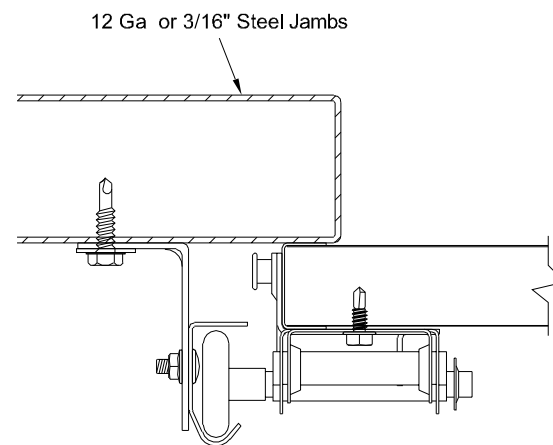

### Direct Steel Mounting Detail

Bracket Mount Shown, Reverse and Continuous Angle Mount Also Approved As Alternate.


232 lbs. per anchor allowable load - 12 Ga Steel  
 569 lbs. per anchor allowable load - 3/16" Ga Steel  
 5/16"-12 Tek Self-Drilling Screw w/9/16" O.D. Flat Washer  
 12 Ga Maximum on Center Spacing: 24"  
 3/16" Maximum on Center Spacing: 24"

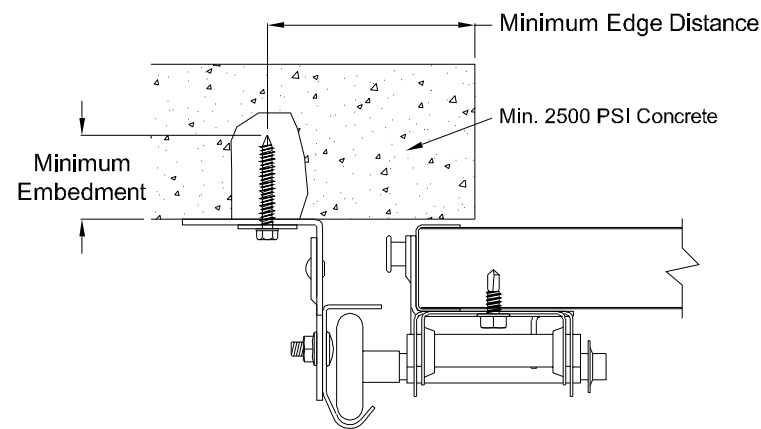

### Direct Concrete Mounting Detail

Continuous Angle Clip Mount Shown, Bracket and Reverse Continuous Angle Mount Also Approved As Alternate.

562 lbs. per anchor allowable load  
 1/4" Dia. Concrete Self-Tapping & Wedge Anchor w/1" O.D. Flat Washer (Includes Tapcon+ (by ITW), Wedge-Bolt+ (by Powers Fasteners) & Red Head TruBolt wedge anchor (by ITW))  
 Minimum Embedment: 2"  
 Minimum Edge Distance: 2-1/2"  
 Minimum on Center Spacing: 5"  
 Maximum on Center Spacing: 24"

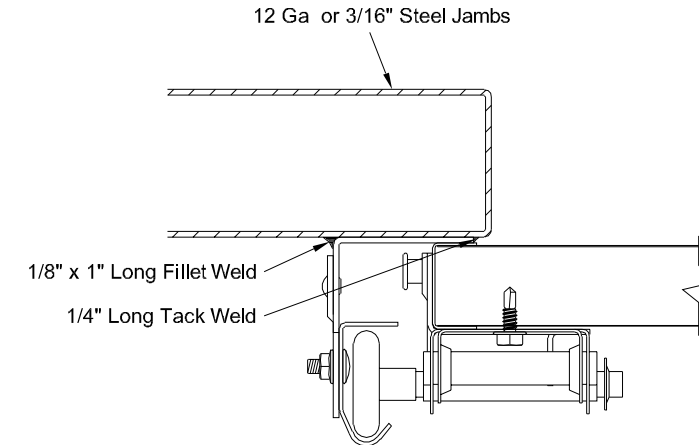

### Direct Steel Mounting Detail

Reverse Continuous Angle Clip Mount Shown, Continuous Angle Mount Also Approved As Alternate.

1272 lbs. per anchor allowable load  
 1/8" Nom. x 1" Long Fillet and 1/4" Long Tack Weld (E60xx Electrodes Min.)  
 Welds performed by a certified welder or inspected by a certified welding inspector to verify integrity of the welds.  
 Maximum on Center Spacing: Apply welds at each roller location not to exceed 24"

John E. Scates, P.E.  
 2560 King Arthur Blvd. Ste 124-54  
 Lewisville, Texas 75056  
 Texas P.E. 56308/F2203

Professional Engineer seal provided only for verification of wind load construction details.



<b>DESCRIPTION:</b> 10' 2" PAN 2000 SERIES WIND LOAD SECTIONAL DOOR DESIGN PRESSURE +21.3/-24.1 PSF			
<b>DRAWING NO.:</b> WLT-2000-0122-08-21-24	<b>REV.:</b> A		
<b>DRAWN BY:</b> MVS	<b>DATE DRAWN:</b> 11/6/18	<b>REV. DATE:</b> 3/8/22	
<b>MODEL(S):</b> See Sheet 3	<b>SHEET: 4 OF 4</b>		

320 Sycamore  
 Wauseon, Ohio 43567  
 © Copyright 2014