

NOTE: Track configuration above the door opening does not affect the wind load rating of the door.

Door Height 7' - 0" Shown  
See chart below for other door heights

Door Width 9' - 2" Shown  
See chart below for other door widths

Jamb bracket quantities shown are for use with grade 2 or better southern pine jambs.

Supporting structural elements are to be designed by a registered professional engineer for specific wind loads.

This product has been tested per TAS 202 and ANSI/DASMA 108 for static air pressure.

Door Widths Up To	Design Pressures		End Stile	Model Number											
	+ psf	- psf		Minimum Center Stiles		Minimum Center Hinges		Minimum Center Stiles		Minimum Center Hinges		Minimum Center Stiles		Minimum Center Hinges	
8'-2"	30.0	-33.9	Single	3	1	3	1	3	1	3	1	3	1	3	1
9'-2"	26.7	-30.2	Single	3	1	3	1	3	1	3	1	3	1	3	1
10'-2"	21.7	-24.6	Single	4	2	3	1	3	1	5	2	3	1	5	2

Door Height	Total # of Sections	Total # of Struts	Jamb Brkts per Side
6'-0"	4	4	5
6'-3"	4	4	5
6'-6"	4	4	6
6'-9"	4	4	6
7'-0"	4	4	6
7'-6"	5	5	7
7'-9"	5	5	7
8'-0"	5	5	7

**NOTICE:**  
These drawings are a supplement to the installation instructions for a standard door and only covers those procedures that vary from standard door installation. If these specific procedures are not followed, the door may not perform as designed.

John E. Scates, P.E.  
2560 King Arthur Blvd. Ste 124-54  
Lewisville, Texas 75056  
Texas P.E. 56308/F2203

Maximum section height is 21 in.

Maximum door height is 20 ft.

All doors, even those above the tested height, are available with jamb brackets or commercial full angle. The maximum spacing of the jamb brackets/track clips should be maintained.

COMPLIES WITH IBC/IRC 2018 Professional Engineer seal provided only for verification of wind load construction details.

This product is designed and sold by PSF. The AHJ or Engineer of Record is responsible for determining the PSF required for any given site.


**DESCRIPTION:**  
9' 2" PAN 2000 SERIES WIND LOAD SECTIONAL DOOR  
DESIGN PRESSURE +26.7/-30.2 PSF

**DRAWING NO.:** WLT-2000-0110-26-30 **REV.:** A

**DRAWN BY:** MVS **DATE DRAWN:** 12/17/18 **REV. DATE:** 3/8/22

**MODEL(S):** See Sheet 3 **SHEET: 1 OF 4**

320 Sycamore  
Wauseon, Ohio 43567  
© Copyright 2014

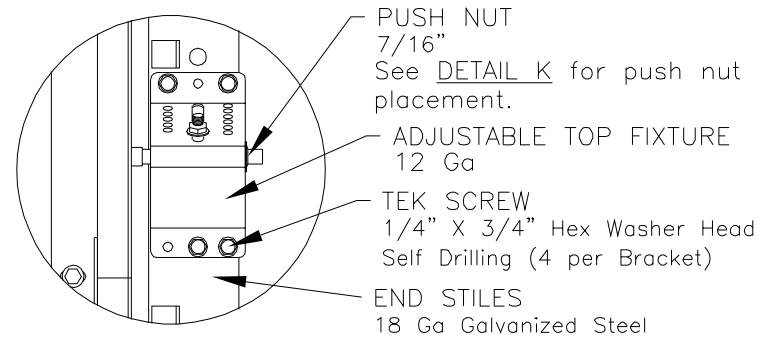


**DETAIL A**

PUSH NUT  
7/16"  
See DETAIL K for push nut placement.

ADJUSTABLE TOP FIXTURE  
12 Ga

TEK SCREW  
1/4" X 3/4" Hex Washer Head Self Drilling (4 per Bracket)

END STILES  
18 Ga Galvanized Steel

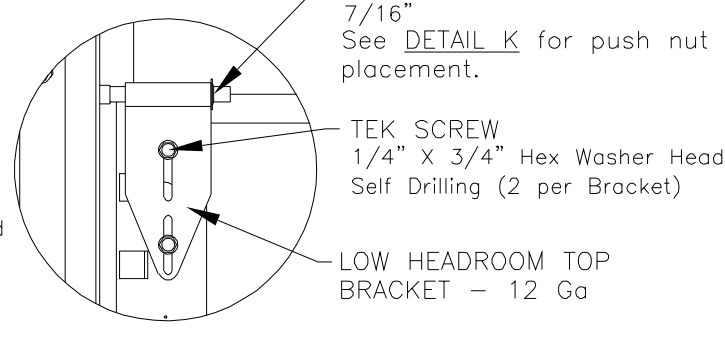


**LOW HEADROOM TOP BRACKET**

PUSH NUT  
7/16"  
See DETAIL K for push nut placement.

TEK SCREW  
1/4" X 3/4" Hex Washer Head Self Drilling (2 per Bracket)

LOW HEADROOM TOP BRACKET - 12 Ga

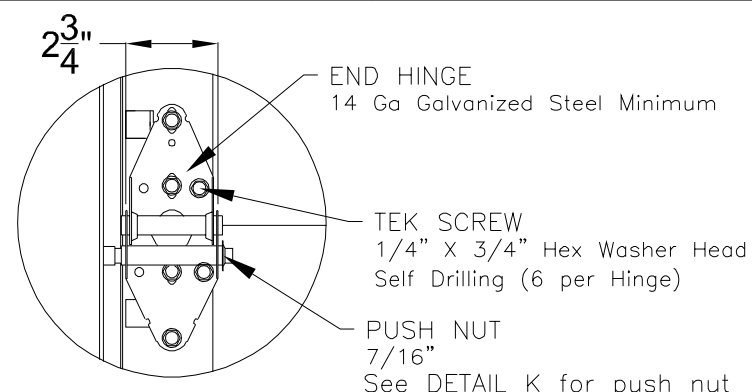


**DETAIL B**

END HINGE  
14 Ga Galvanized Steel Minimum

TEK SCREW  
1/4" X 3/4" Hex Washer Head Self Drilling (6 per Hinge)

PUSH NUT  
7/16"  
See DETAIL K for push nut placement.

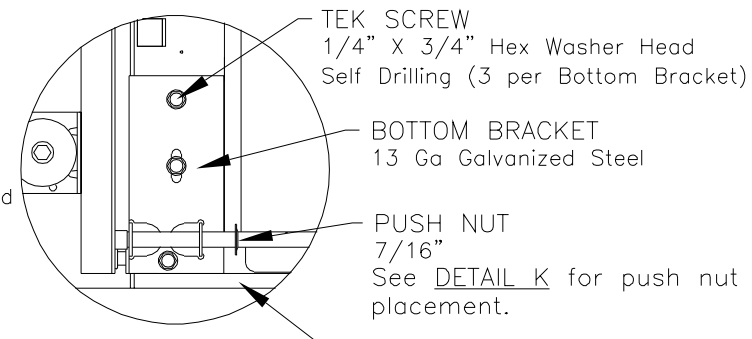


**DETAIL C**

TEK SCREW  
1/4" X 3/4" Hex Washer Head Self Drilling (3 per Bottom Bracket)

BOTTOM BRACKET  
13 Ga Galvanized Steel

PUSH NUT  
7/16"  
See DETAIL K for push nut placement.

BOTTOM SEAL

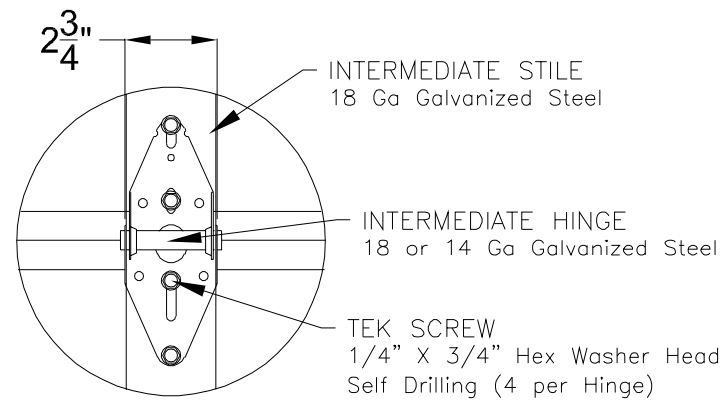


**DETAIL D**

INTERMEDIATE STILE  
18 Ga Galvanized Steel

INTERMEDIATE HINGE  
18 or 14 Ga Galvanized Steel


TEK SCREW  
1/4" X 3/4" Hex Washer Head Self Drilling (4 per Hinge)

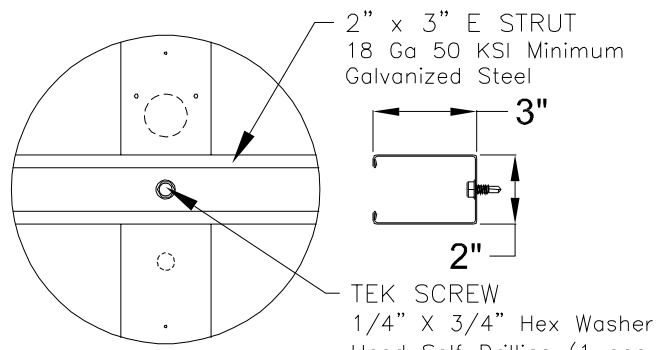

**DETAIL E**

2" x 3" E STRUT  
18 Ga 50 KSI Minimum Galvanized Steel


TEK SCREW  
1/4" X 3/4" Hex Washer Head Self Drilling (1 per End & Intermediate Stiles)

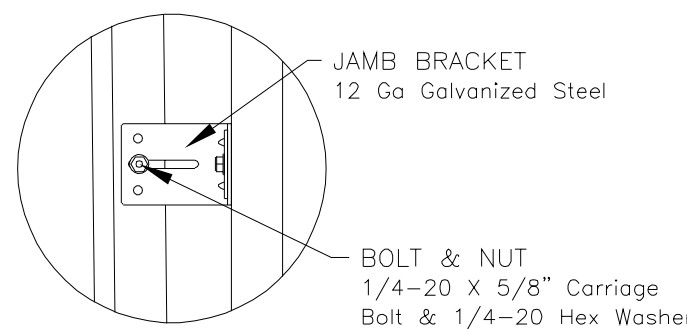

**DETAIL F**

JAMB BRACKET  
12 Ga Galvanized Steel


BOLT & NUT  
1/4-20 X 5/8" Carriage Bolt & 1/4-20 Hex Washer Nut (1 per Jamb Bracket)

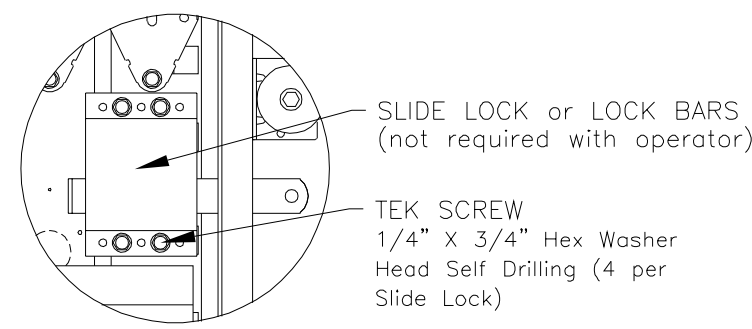

**DETAIL G**

SLIDE LOCK or LOCK BARS (not required with operator)

TEK SCREW  
1/4" X 3/4" Hex Washer Head Self Drilling (4 per Slide Lock)

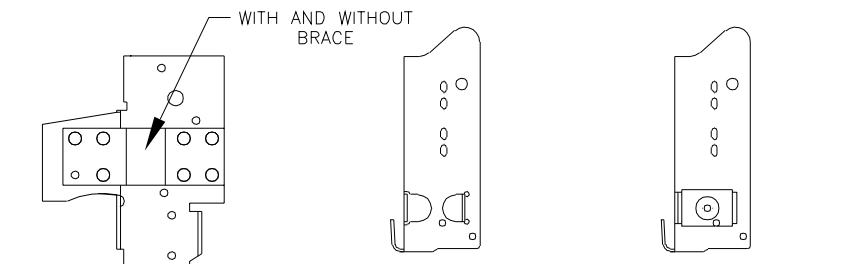

WITH AND WITHOUT BRACE


RESIDENTIAL & LIGHT COMMERCIAL  
For Low Headroom With 2" Track and Single End Stiles

COMMERCIAL  
For Standard, High & Vertical Lift With 2" Track and Single End Stiles

COMMERCIAL  
For Standard, High & Vertical Lift With 3" Track and Single End Stiles

**ALTERNATE BOTTOM BRACKETS**

NOTE: The bottom bracket tested (shown in DETAIL C) is the lightest bracket available.




**DETAIL K**

Maximum 1/2"

There should be a space of maximum 1/2" between the roller hub and the outside edge of the roller holder which is set by the push nut.

NOTE: Details on some views omitted for clarity. Double end stiles and end hardware may be provided on wider or heavier doors.

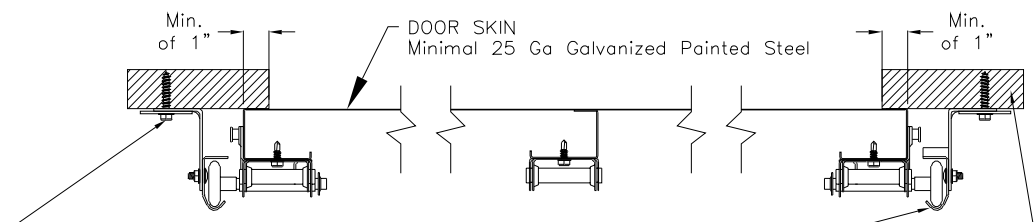


DOOR SKIN  
Minimal 25 Ga Galvanized Painted Steel

WOOD JAMB  
The vertical wood jamb fasteners may be counter sunk to provide a flat mounting surface. See jamb attachment details on sheet 3 for attaching jambs to the structure.


VERTICAL TRACK - 2" Nominal 13 Ga Galvanized Steel tested. 3" Nominal 13 Ga is also approved as an alternate.

BOLT & WASHER  
5/16" X 1 5/8" Lag Bolt & 2" O.D. x 7/16" I.D. Flat Washer  
NOTE: Jamb bracket must be in direct contact with the 2x6 (No drywall allowed).  
NOTE: A 5/8" minimal O.D. flat washer (not provided) is required for angle mount.



**ROLLER**

2" Diameter Nominal Eleven Ball Nylon or Ten Ball Steel with a Minimum Workable Shaft Length Shown.

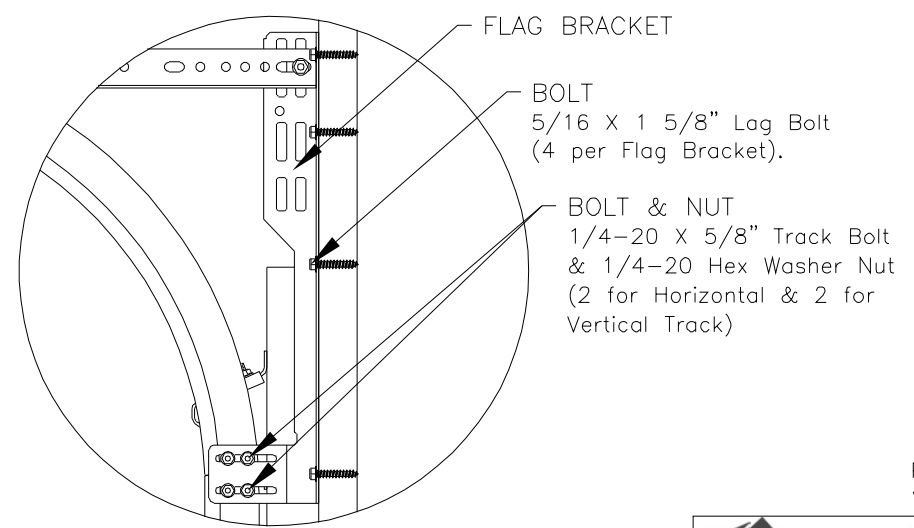

**DETAIL H**

FLAG BRACKET

BOLT  
5/16 X 1 5/8" Lag Bolt (4 per Flag Bracket).

BOLT & NUT  
1/4-20 X 5/8" Track Bolt & 1/4-20 Hex Washer Nut (2 for Horizontal & 2 for Vertical Track)

John E. Scates, P.E.  
2560 King Arthur Blvd. Ste 124-54  
Lewisville, Texas 75056  
Texas P.E. 56308/F2203


Professional Engineer seal provided only for verification of wind load construction details.

<p>320 Sycamore Wauseon, Ohio 43567 © Copyright 2014</p>	<b>DESCRIPTION:</b>	
	9' 2" PAN 2000 SERIES WIND LOAD SECTIONAL DOOR DESIGN PRESSURE +26.7-30.2 PSF	
	<b>DRAWING NO.:</b> WLT-2000-0110-26-30	<b>REV.:</b> A
	<b>DRAWN BY:</b> MVS	<b>DATE DRAWN:</b> 12/17/18
<b>MODEL(S):</b> See Sheet 3	<b>REV. DATE:</b> 3/8/22	<b>SHEET: 2 OF 4</b>

1 2 3 4 5 6 7 8

F  
E  
D  
C  
B  
A

F  
E  
D  
C  
B  
A

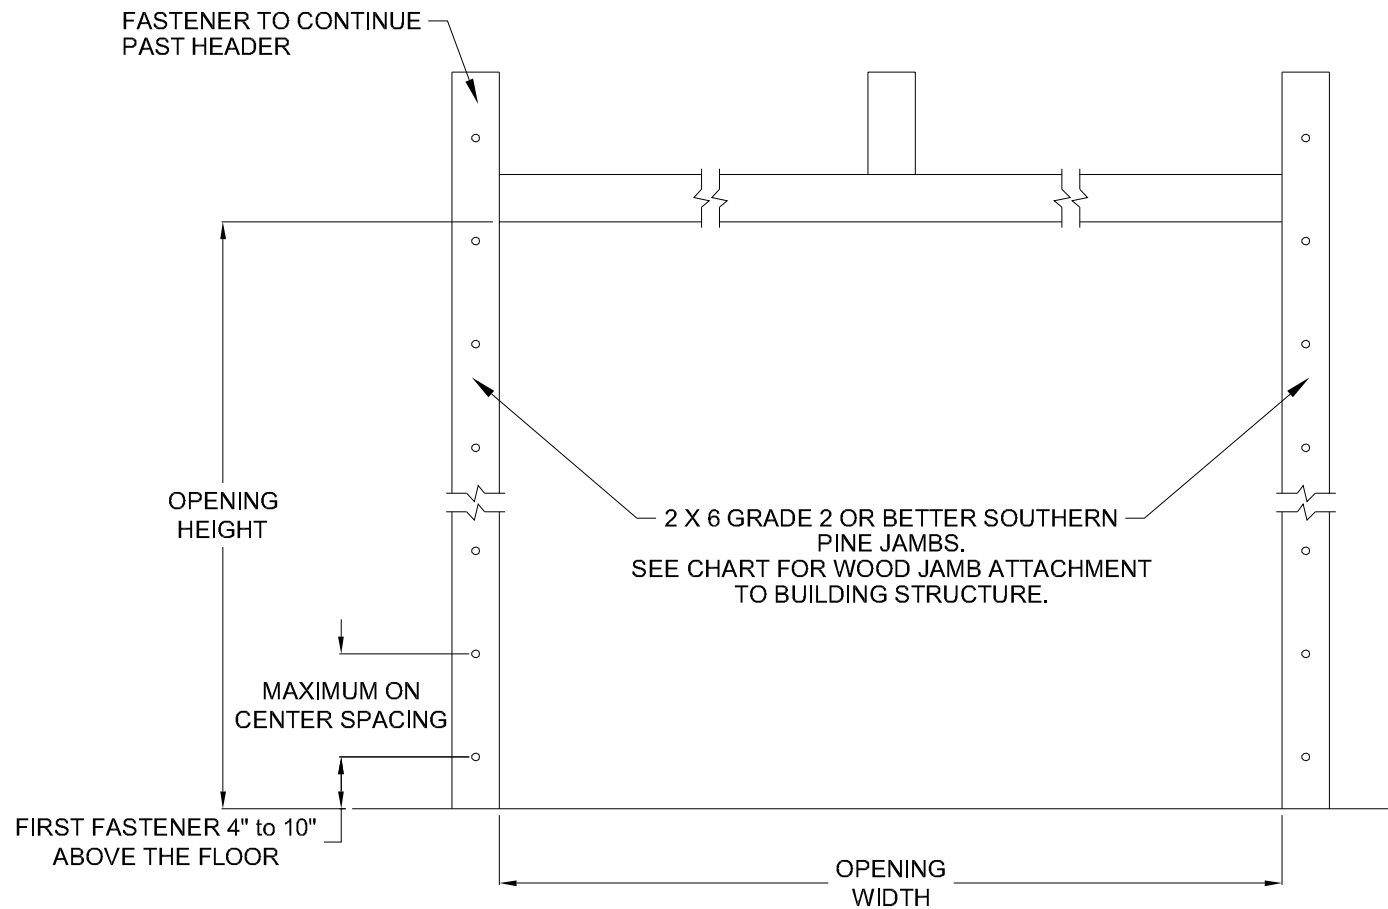

# MODEL NUMBERS

MODEL NUMBERS AVAILABLE
PAN C2011 SERIES
PAN C2015 SERIES
PAN C2411 SERIES
PAN C2415 SERIES
PAN C2511 SERIES
PAN C2410 & R2410 SERIES
PAN C2460 & R2460 SERIES
PAN C2461 & R2461 SERIES
PAN C2471 & R2471 SERIES
PAN C2472 & R2472 SERIES
PAN C2480 & R2480 SERIES
PAN C2481 & R2481 SERIES
PAN C2482 & R2482 SERIES
PAN R2560 SERIES
PAN R2561 SERIES
PAN R2571 SERIES
PAN R2572 SERIES
PAN R2580 SERIES
PAN R2581 SERIES
PAN R2582 SERIES

WOOD JAMB ATTACHMENT						
Building Structure	Fastener Type	Minimum Embedment	Minimum Edge Distance	Minimum on Center Spacing	Maximum on Center Spacing	Allowable Tension Load
Min. 2500 PSI to 4000 PSI Concrete	Tapcon + (PLUS) 1/4" w/ 1" OD washer	2"	2.50"	5.00"	24"	551
Southern Pine	3/8" Lag w/ 1 1/8" OD washer	1.50"	1.50"	1.50"	24"	620
Spruce Pine Fir	3/8" Lag w/ 1 1/8" OD washer	1.50"	1.50"	1.50"	24"	482

NOTE: 2X6 mounted to the wall must be Southern Pine Grade 2 or better.

John E. Scates, P.E.  
2560 King Arthur Blvd. Ste 124-54  
Lewisville, Texas 75056  
Texas P.E. 56308/F2203

Professional Engineer seal provided only for verification of wind load construction details.




**DESCRIPTION:**  
9' 2" PAN 2000 SERIES WIND LOAD SECTIONAL DOOR  
DESIGN PRESSURE +26.7/-30.2 PSF

320 Sycamore  
Wauseon, Ohio 43567  
© Copyright 2014

<b>DRAWING NO.:</b> WLT-2000-0110-26-30	<b>REV.:</b> A
<b>DRAWN BY:</b> MVS	<b>DATE DRAWN:</b> 12/17/18
<b>MODEL(S):</b> See Sheet 3	<b>REV. DATE:</b> 3/8/22
<b>SHEET: 3 OF 4</b>	

1 2 3 4 5 6 7 8

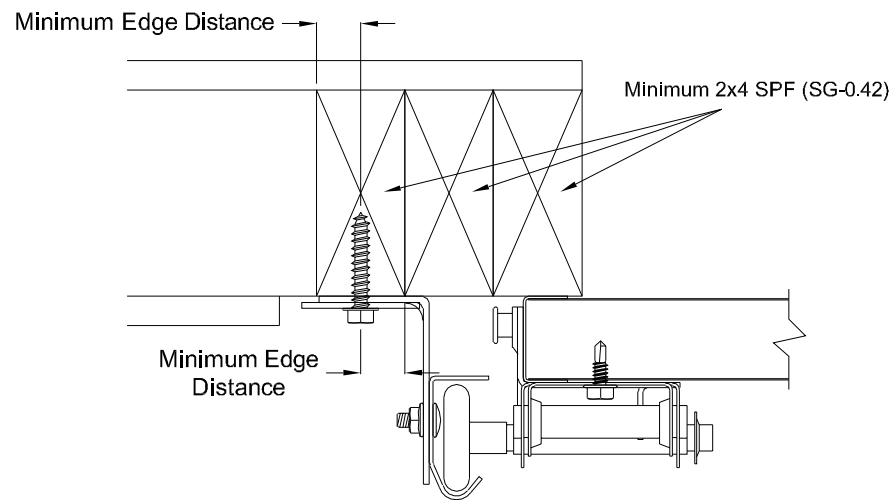

### Direct Wood Mounting Detail

Bracket Mount Shown, Reverse and Continuous Angle Mount Also Approved As Alternate.


439 lbs. per anchor allowable load

5/16" Dia. Lag Screw w/1-1/8" O.D. Flat Washer (shall conform to ANSI/ASME standard B18.2.1)

Minimum Screw Length: Spruce-Pine-Fur (SPF) - 2-1/2"  
Southern Pine - 1-5/8"

Minimum Edge Distance: 1/2"

Maximum on Center Spacing: 24"

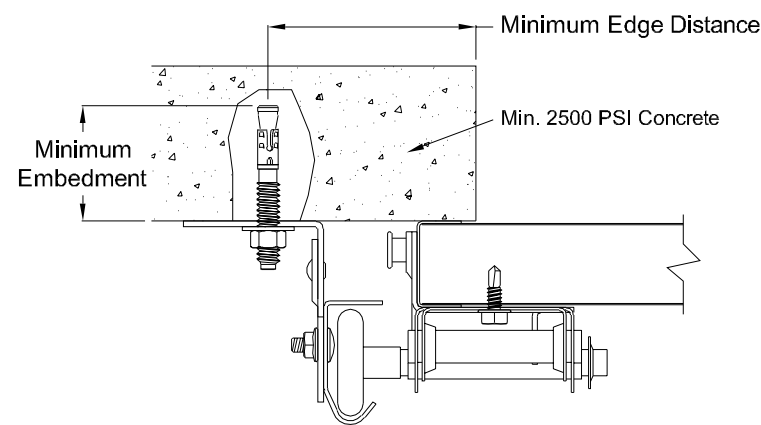

### Direct Concrete Mounting Detail

Continuous Angle Clip Mount Shown, Bracket and Reverse Continuous Angle Mount Also Approved As Alternate.

831 lbs. per anchor allowable load


3/8" Dia. Ankr-Tite CCAT w/1-1/8" O.D. Flat Washer (by Wej-It Fastening Systems)

Minimum Embedment: 2-5/8"

Minimum Edge Distance: 2-1/2"

Minimum on Center Spacing: 6"

Maximum on Center Spacing: 24"

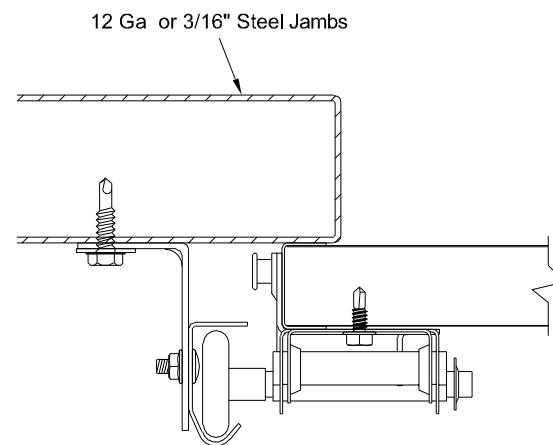

### Direct Steel Mounting Detail


Bracket Mount Shown, Reverse and Continuous Angle Mount Also Approved As Alternate.

232 lbs. per anchor allowable load - 12 Ga Steel

569 lbs. per anchor allowable load - 3/16" Ga Steel  
5/16"-12 Tek Self-Drilling Screw w/9/16" O.D. Flat Washer

12 Ga Maximum on Center Spacing: 23"

3/16" Maximum on Center Spacing: 24"

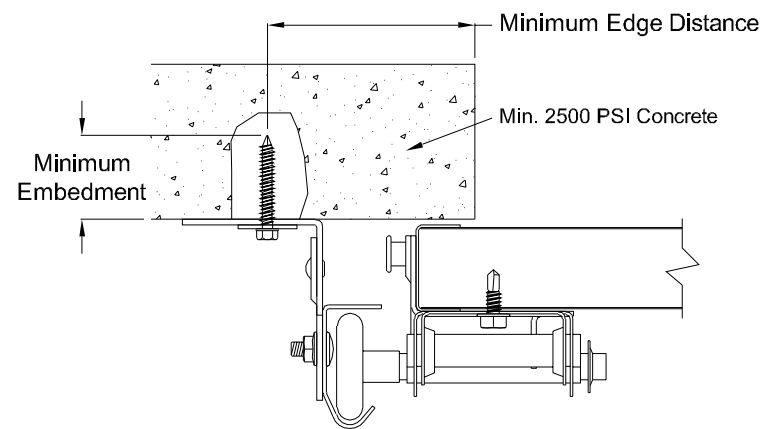

### Direct Concrete Mounting Detail

Continuous Angle Clip Mount Shown, Bracket and Reverse Continuous Angle Mount Also Approved As Alternate.

562 lbs. per anchor allowable load

1/4" Dia. Concrete Self-Tapping & Wedge Anchor w/1" O.D. Flat Washer (Includes Tapcon+ (by ITW), Wedge-Bolt+ (by Powers Fasteners) & Red Head


TruBolt wedge anchor (by ITW))

Minimum Embedment: 2"

Minimum Edge Distance: 2-1/2"

Minimum on Center Spacing: 5"

Maximum on Center Spacing: 24"

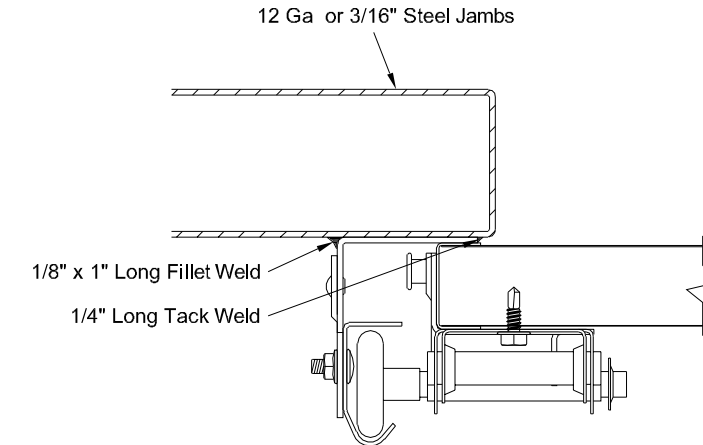

### Direct Steel Mounting Detail

Reverse Continuous Angle Clip Mount Shown, Continuous Angle Mount Also Approved As Alternate.

1272 lbs. per anchor allowable load

1/8" Nom. x 1" Long Fillet and 1/4" Long Tack Weld (E60xx Electrodes Min.)

Welds performed by a certified welder or inspected by a certified welding inspector to verify integrity of the welds.

Maximum on Center Spacing: Apply welds at each roller location not to exceed 24"

John E. Scates, P.E.  
2560 King Arthur Blvd. Ste 124-54  
Lewisville, Texas 75056  
Texas P.E. 56308/F2203

Professional Engineer seal provided only for verification of wind load construction details.



<b>DESCRIPTION:</b> 9' 2" PAN 2000 SERIES WIND LOAD SECTIONAL DOOR DESIGN PRESSURE +26.7/-30.2 PSF			
<b>DRAWING NO.:</b> WLT-2000-0110-26-30	<b>REV.:</b> A		
<b>DRAWN BY:</b> MVS	<b>DATE DRAWN:</b> 12/17/18	<b>REV. DATE:</b> 3/8/22	
<b>MODEL(S):</b> See Sheet 3	<b>SHEET: 4 OF 4</b>		

320 Sycamore  
Wauseon, Ohio 43567  
© Copyright 2014