


NOTE: DOUBLE TRACK LOW HEADROOM, HI-LIFT TRACK, FOLLOW-THE-ROOF TRACK, AND VERTICAL LIFT TRACK ARE AVAILABLE OPTIONS. 3" TRACK ALSO AVAILABLE.

MAX 16'-2" WIDE X 18'-0" HIGH






MODELS AVAILABLE (CLOPAY/ HOLMES/ IDEAL)
 MODELS 524, 520/ 224/ C4ST, C0ST
 INSULATED MODELS 524S, 520S, 524V/ 224S/ C4SS, C0SS, C4SV

REVISIONS					
REV. NO.	ZONE:	DATE:	ECN NO.	APPVD:	DESCRIPTION
11	-	05/2005	-	-	UPDATED CODE REF.
12	-	10/2005	-	-	ADDED ROLLER OPTION
13	-	11/2008	-	-	ADDED MPC; WELD DETAIL.
14	-	02/2012	-	-	UPDATED WINDCODE CHART
15	-	08/2012	-	-	REVISED FOR TDI
16	-	06/2013	-	-	REMOVED ACRYLIC/WIRE GLAZING. SPECIFIED FV DIMENSIONS.
17	-	08/2016	-	-	REMOVED WIND SPEED TABLE.

THE OPTIONAL GLAZING SHOWN ON THIS DRAWING MEETS THE WIND LOAD REQUIREMENTS OF THE FLORIDA BUILDING CODE OR INTERNATIONAL BUILDING CODE BUT DOES NOT MEET THE IMPACT RESISTANT REQUIREMENT FOR WINDBORNE DEBRIS REGIONS (REF. CHAPTER 16 FBC/IBC)

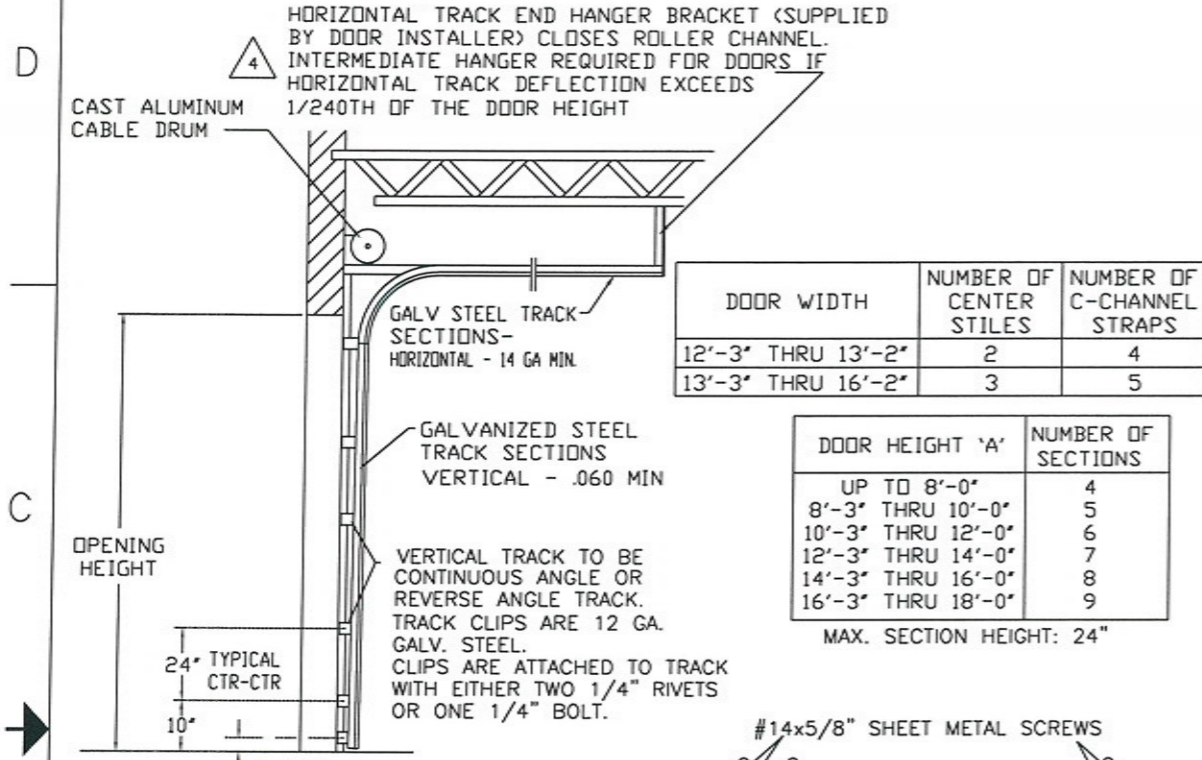

STANDARD-LIFT TRACK DETAILS

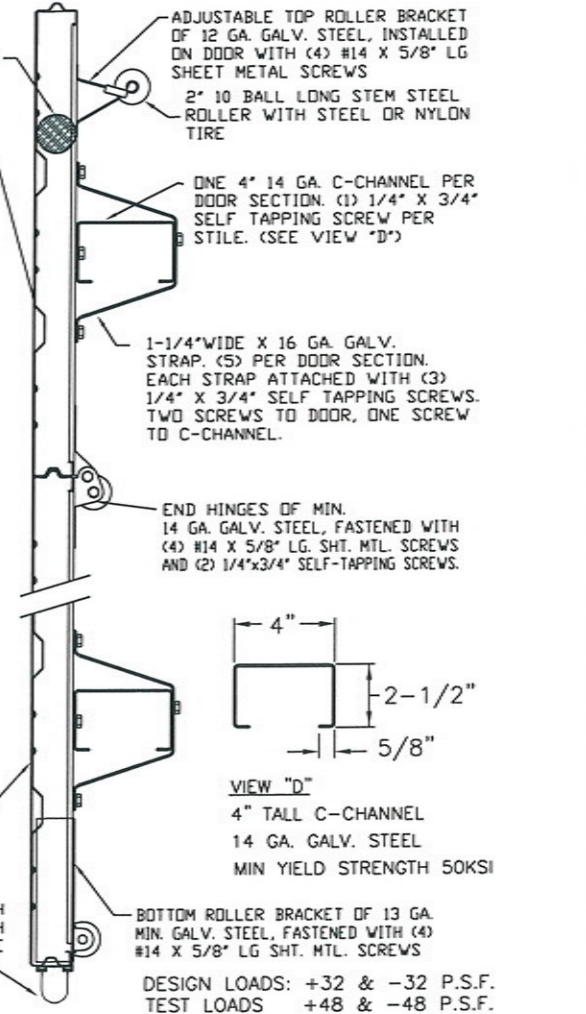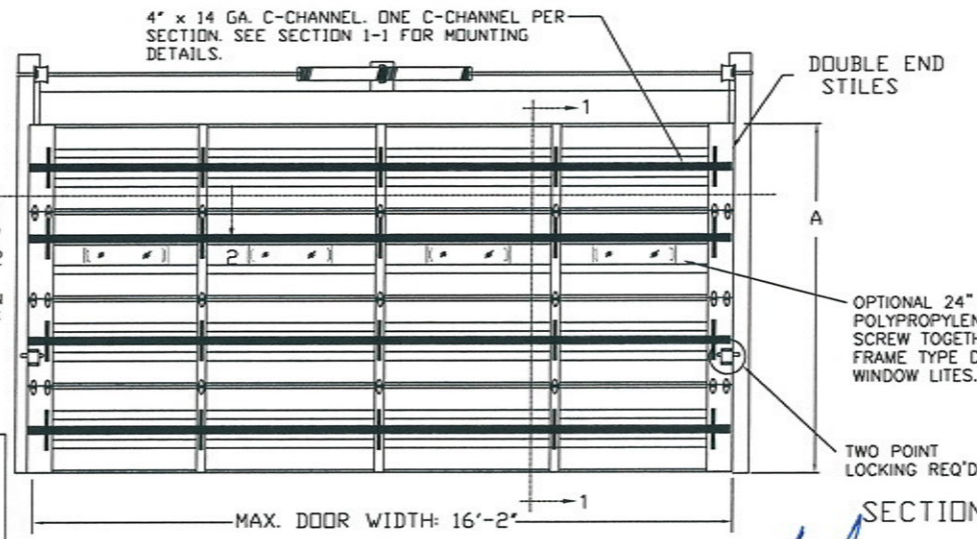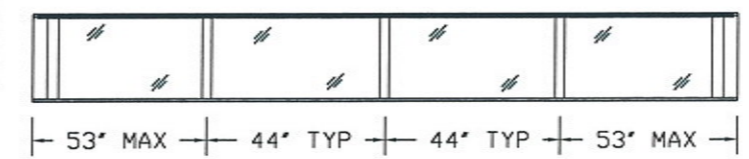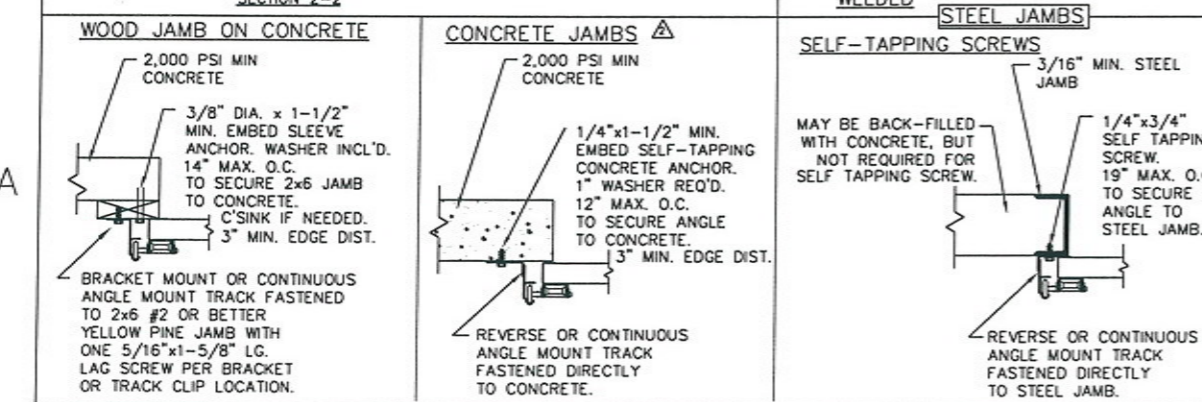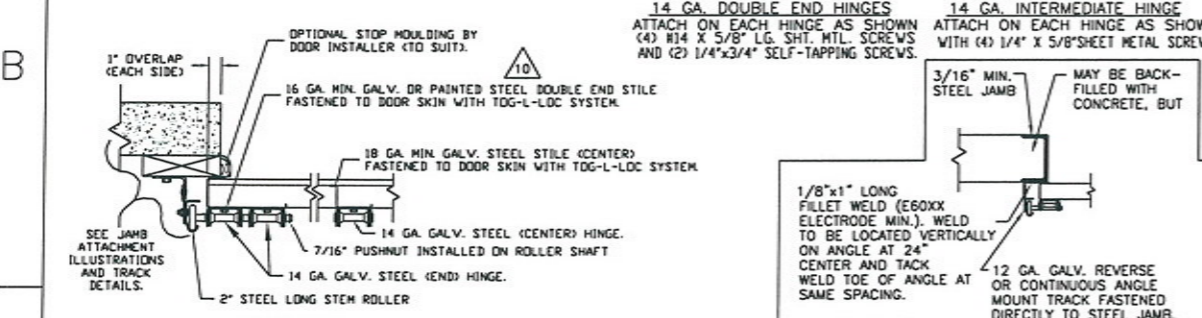

THE DESIGN OF THE SUPPORTING STRUCTURAL ELEMENTS IS THE RESPONSIBILITY OF THE BUILDING ENGINEER OR ARCHITECT OF RECORD.

MARK WESTERFIELD, P.E. FLORIDA P.E. #48495, NC P.E. #23832, TEXAS P.E. #91513

8/12/16

Unless Stated Otherwise TOLERANCES are

±.031	±.015
±.005	±.005
±.001	±.001

Unless Stated Otherwise DIMENSIONS ARE IN INCHES

CLOPAY CORP. ALL RIGHTS RESERVED.

Third Angle Projection

8585 Duke Boulevard
Mason, OH 45040 USA
Tel. No. 513-770-4800
Fax No. 513-770-4853

MANUFACTURING PRODUCT CODE:
MPC: C-PAN-1E448

WINDLOAD RATING
W5

DESCRIPTION: COMMERCIAL RIBBED DOOR, +/- 32 PSF DESIGN LOAD

DRAWN BY: RJK	DATE: 4/14/99	SCALE: NOTED	DWG. SIZE B
CHECKED BY: MWW	DATE: 4/99	SHEET 1 OF 1	

DWG. NO.: 101885