


(4) 1/4" TAPCON SCREWS LENGTH TO PENETRATE CONCRETE 1.75" OR EQUIVALENT, SNUG TO BASE PAN. SCREWS MUST BE PLACED ON BASE PAN AS SHOWN UNLESS OTHERWISE SPECIFIED

UNIT APPLICABILITY TABLE
 AND, ANL, APC, APL, APM, ARA, ARL, ASL, PNE, PNL, PPB, PPC, PPL, PQL, PRL

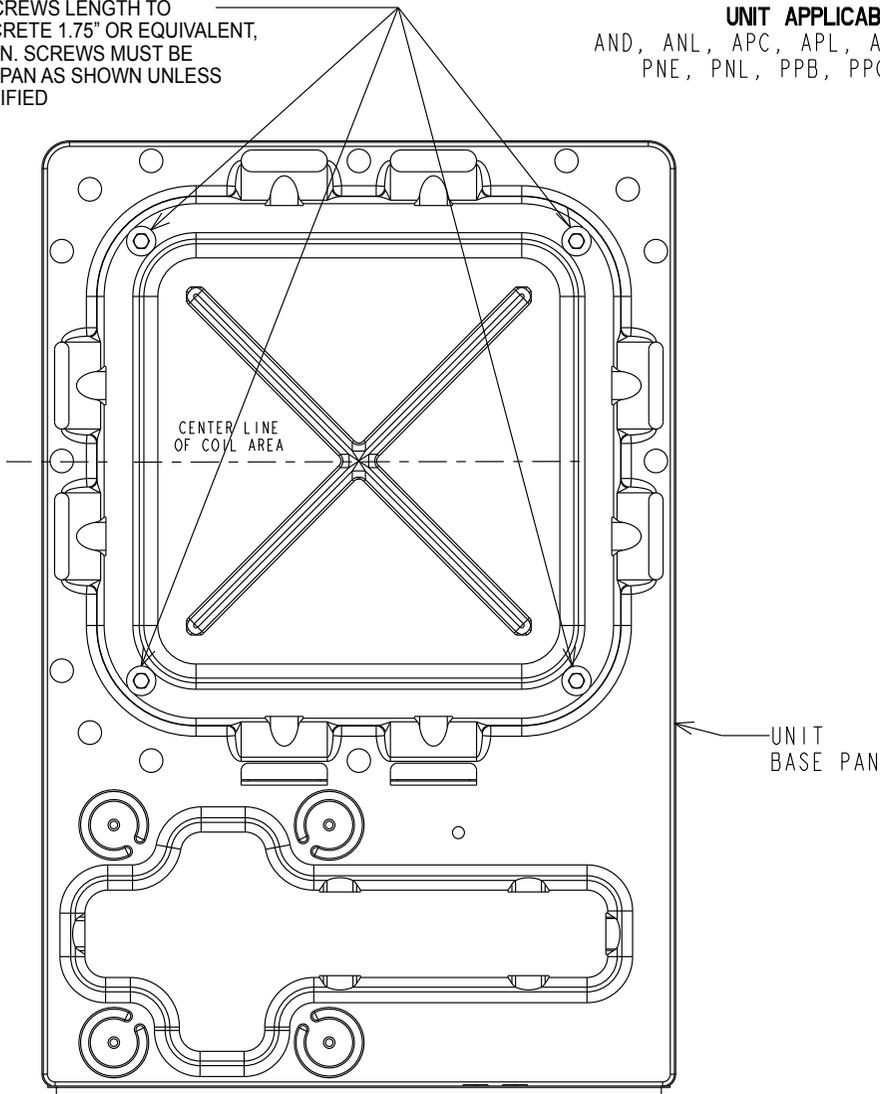

CONCRETE PAD SPECIFICATIONS:
 GREATER THAN OR EQUAL TO 2-1/2" THICK SOLID CONCRETE
 3000 P.S.I. OR GREATER LOAD RATING. PAD LENGTH GREATER
 THAN OR EQUAL TO (UNIT LENGTH +4") PAD WIDTH GREATER
 THAN OR EQUAL TO (UNIT WIDTH +4")

Submitted by:



Diane M. Jakobs, P.E., Ph.D.
 TX Reg. No. 103867
 Rheem Manufacturing
 Dated 5-27-14



DRAWING NO. REV.

ARD3

XII