



FASTENER PATTERN @ EAVE, RIDGE & VALLEY

PANEL FASTENER SPACING ALONG RIB	MINIMUM PLYWOOD THICKNESS	SEAM SEALANT DIAMETER	PRESSURE (PSF)
6"	15/32"	NONE	59.4
6"	15/32"	3/16"	97.5
4"	19/32"	3/16"	107.9

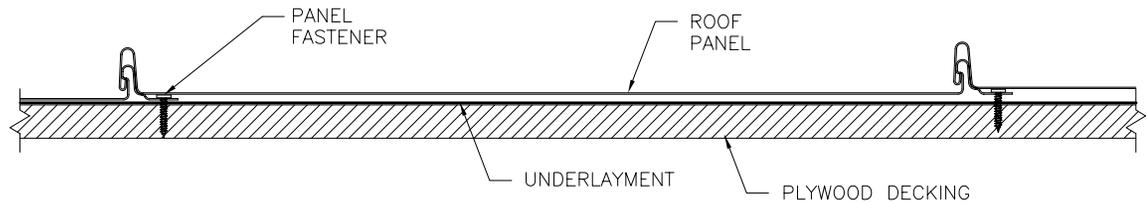


FASTENER PATTERN @ INTERMEDIATE LOCATIONS

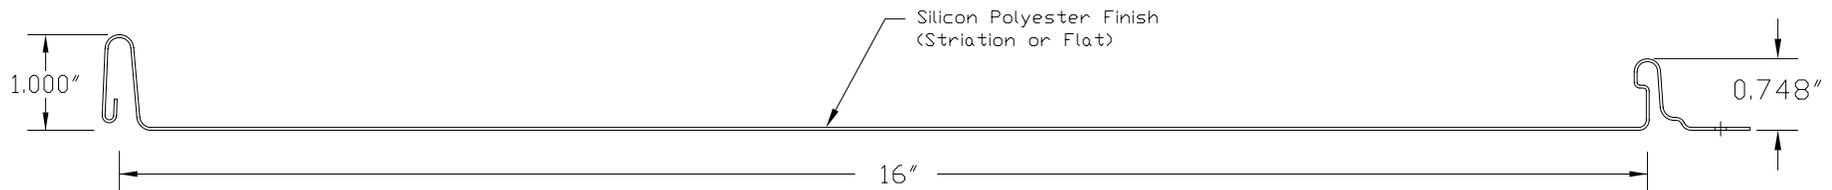


ADVANTAGE-LOK II Panel Profile

24 or 26 Gauge, Minimum Yield = 50 KSI
 ASTM A792 for Galvalume Steel
 ASTM A755 for Painted Steel
 ASTM A653 for Galvanized Steel


REV		DATE	
1			
ADVANTAGE-LOK II Panel			
SCALE:	NONE	NAME:	Bela Sockalingam
DRAWN:		CHECKED:	
APPROVED:		DATE:	4-18-2008
CAD FILE:	SV		
UNION CORRUGATING COMPANY 701 SOUTH KING ST FAYETTEVILLE, NC 28402 Ph. (910) 485-2185 Fax: (910) 485-1091			
DATE:	4-18-2008		
1 OF 2			
Sheet No.			

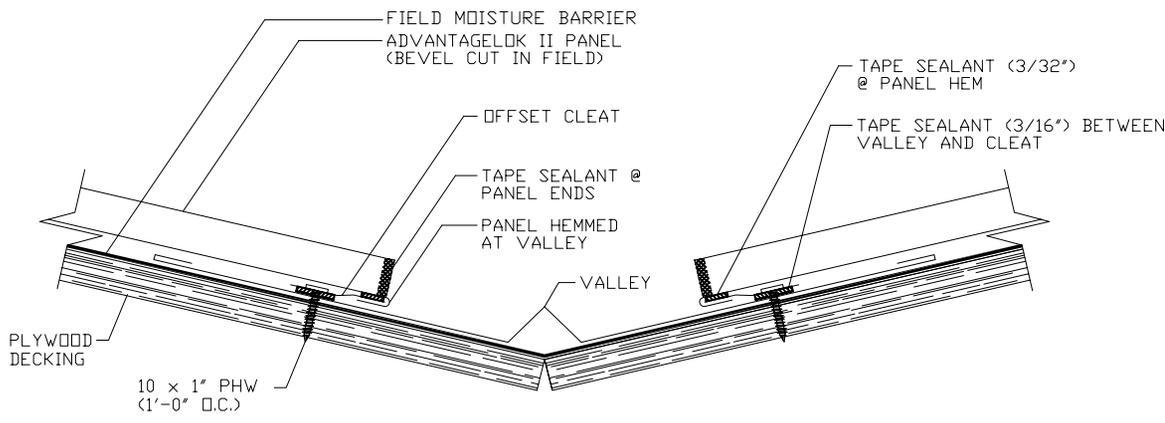

VALLEY DETAIL

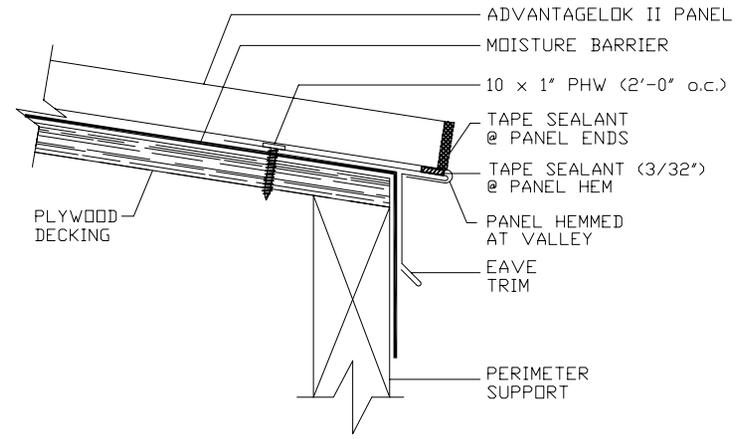

EAVE DETAIL

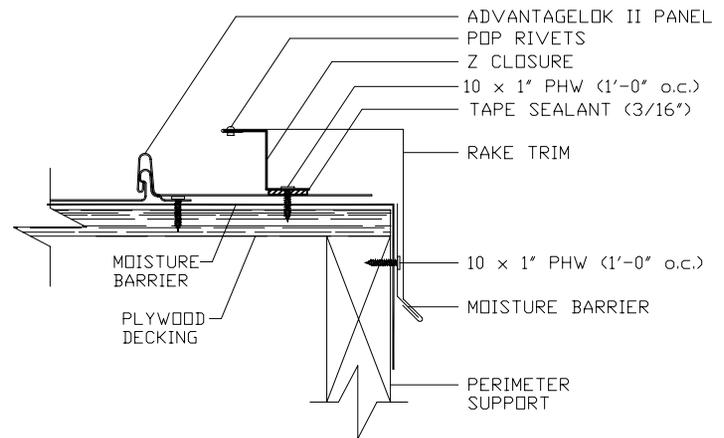

RAKE DETAIL

UNION CORRUGATING COMPANY		DATE: 4-18-2008	
701 SOUTH KING ST FARETTVILLE, NC 28602		2 OF 2	
Ph: (610) 485-2185 Fax: (610) 485-1091		Sheet No.	
ADVANTAGE-LOK II Panel		REV. DATE	
SCALE: NONE	NAME: Boba Sockalingam	1	
DRAWN: Boba Sockalingam	DATE: 4-18-2008		
CHECKED:			
APPROVED:			